

Stainless Steel Series Basic Valves

LEAD FREE*

600GS / 600AS Reduced Port Stainless Steel Dual Chamber Basic Valve


The Ames ACV Models 600GS and 600AS are reduced port, dual chamber basic valves that incorporate a one-piece disc and diaphragm assembly. This assembly is the only moving part within the valve, allowing it to open or close as commanded by the pilot control system. When pressure is applied to the upper diaphragm chamber and released from the lower diaphragm chamber, the valve travels to a closed position. When pressure is applied to the lower diaphragm chamber and released from the upper diaphragm chamber the valve travels to a full open position. When pressure is balanced between the upper and lower diaphragm chambers, the valve will hold an intermediate position until commanded to modulate open or closed by the pilot control system.

The Stainless Steel design offers superior corrosion resistance, as well as a lightweight alternative to conventional heavy iron valves. Stainless Steel construction reduces corrosion, reducing diaphragm wear and the frequency and labor costs associated with traditional maintenance repairs.

Ames ACV Main Valves are Lead Free. The Ames ACV piloting system contains Lead Free* components, ensuring all of our configurations are Lead Free compliant.

600GS (Globe)

600AS (Angle)

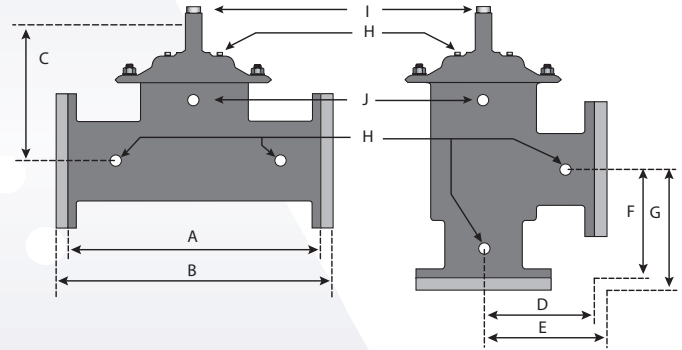

Model 600GS: Globe Pattern Dual Chamber Basic Valve

Model 600AS: Angle Pattern Dual Chamber Basic Valve

Dimensions

Valve Size	Globe 150#		Globe 300#		Cover To Center		Angle 150#		Angle 300#		Angle 150#		Angle 300#		Port Size NPT	Port Size NPT	Port Size NPT	Shipping Weights*	
	A	B	C	D	E	F	G	H	I	J	lbs.	kgs.							
6	17 $\frac{3}{4}$	451	18 $\frac{5}{8}$	473	15 $\frac{1}{4}$	387	8 $\frac{7}{8}$	225	9 $\frac{3}{8}$	238	6 $\frac{3}{4}$	171	7 $\frac{1}{4}$	184	$\frac{1}{2}$	$\frac{3}{4}$	$\frac{1}{2}$	130	59
8	21 $\frac{3}{8}$	543	22 $\frac{3}{8}$	568	20 $\frac{1}{8}$	511	10 $\frac{11}{16}$	271	11 $\frac{3}{16}$	284	7 $\frac{1}{4}$	184	7 $\frac{3}{4}$	197	$\frac{1}{2}$	$\frac{3}{4}$	$\frac{1}{2}$	210	95
10	26	660	27 $\frac{3}{8}$	695	23 $\frac{11}{16}$	602									1	1	$\frac{1}{2}$	363	165
12	30	762	31 $\frac{1}{2}$	800	26 $\frac{1}{4}$	667									1	1 $\frac{1}{4}$	$\frac{1}{2}$	528	240
16	35	889	36 $\frac{3}{8}$	930	34 $\frac{1}{8}$	867									1	1 $\frac{1}{2}$	1	826	375
18	48	1219	49 $\frac{5}{8}$	1260	41	1041									1	1 $\frac{1}{2}$	1	1365	619
20	48	1219	49 $\frac{5}{8}$	1260	41	1041									1	1 $\frac{1}{2}$	1	1390	630
24	48	1219	49 $\frac{3}{4}$	1264	41	1041									1	1 $\frac{1}{2}$	1	1485	674

Standard Materials

Body, Cover &

Flanges: 304L Stainless Steel (standard)
316L Stainless Steel (optional)

Trim: 316 Stainless Steel

Elastomers: Buna-N (standard)
EPDM (optional)
Viton® (optional)

Stem, Nut &

Spring: Stainless Steel

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Ames Fire & Waterworks product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Ames Fire & Waterworks Technical Service. Ames Fire & Waterworks reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Ames Fire & Waterworks products previously or subsequently sold.

Operating Pressure

150 Flanged = 250psi (17.2 bar)

Operating Temperature

Buna-N: 160°F (71°C) Maximum

EPDM: 300°F (140°C) Maximum

Viton®: 250°F (121°C) Maximum

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Viton® is a registered trademark of DuPont Dow Elastomers.



600GS / 600AS — Reduced Port Stainless Steel Dual Chamber Basic Valve


Flow Data - ACV 600GS (Globe) / 600AS (Angle)

Valve Size - Inches		6	8	10	12	16	18	20	24
Suggested	Maximum Continuous Flow Rate Gpm (Water)	800	1850	3100	5000	7000	11100	11100	11100
	Maximum Intermittent Flow Rate Gpm (Water)	1000	2300	4000	6250	8900	14100	14100	14100
	Minimum Flow Rate Gpm (Water)	16	17	25	55	70	400	400	400
C _v	Factor GPM (Globe)	224	489	932	1428	2067	2881	2881	2881
	Factor GPM (Angle)	237	534						

- Maximum continuous flow based on velocity of 20 ft. per second.
- Maximum intermittent flow based on velocity of 25 ft. per second.
- Minimum flow rates based on a 20-40 psi pressure drop.
- The C_v Factor of a valve is the flow rate in US GPM at 60°F that will cause a 1psi drop in pressure.
- C_v factor can be used in the following equations to determine Flow (Q) and Pressure Drop (ΔP):

$$Q \text{ (Flow)} = C_v \sqrt{\Delta P} \quad \Delta P \text{ (Pressure Drop)} = (Q/C_v)^2$$

----- Angle
 _____ Globe

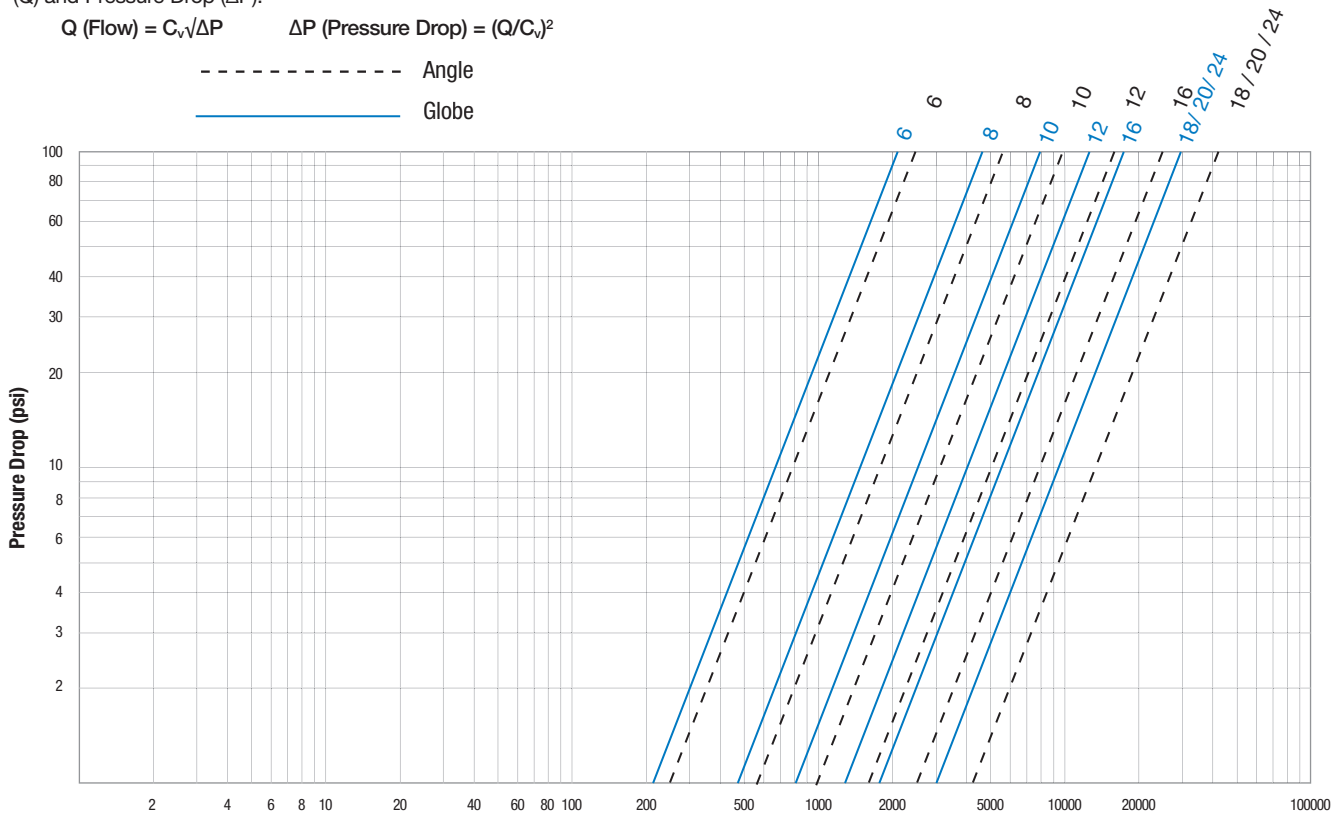

Valve Cover Chamber Capacity

Flow Rate - Gallons per minute (Water)

Valve Size (in)	6	8	10	12	16	18	20	24
fl.oz.	22	70						
U.S. Gal			1¼	2½	4	9½	9½	9½

Valve Travel

Valve Size (in)	6	8	10	12	16	18	20	24
(in)	1	1½	2	2½	3	4	4	4



A Watts Water Technologies Company

USA: Backflow Tel: (978) 689-6066 • Fax: (978) 975-8350 • AmesFireWater.com
 USA: Control Valves Tel: (713) 943-0688 • Fax: (713) 944-9445 • AmesFireWater.com
 Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • AmesFireWater.ca
 Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • AmesFireWater.com