

For Commercial & Residential Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

LEAD FREE*

Series CWH-S-QC
Braided Quick-Connect
Supply Lines for Water Heaters

Sizes: 3/4" (20 mm)

Watts Quick-Connect supply lines are easy to install to copper, PEX, or CPVC tubing. The Quick-Connect fittings require no special tools, glues, crimping, or soldering. Connectors are available for Water Heaters with standard fitting end 3/4"

Connectors are NSF, IAPMO Certified.

Features

- Available in 12", 18" and 24" (300, 450, 610mm) lengths
- IAPMO Certified
- NSF Certified
- Lead Free* Compliant

Pressure — Temperature


Maximum Pressure: 150psi (10.3 bar)

Maximum Temperature: 180°F (82°C)



CWH-S-QC

Typical Installation

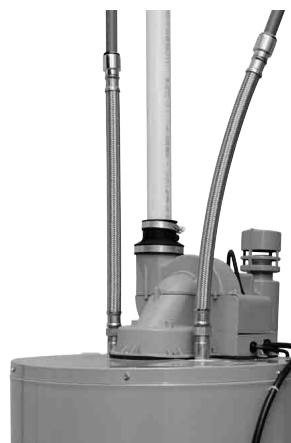

MODEL	ORDERING CODE	DESCRIPTION	LENGTH
Water Heaters Application			
CWH-S-QC	0299052	3/4 QC X 3/4 FIP	12"
CWH-S-QC	0299053	3/4 QC X 3/4 FIP	18"
CWH-S-QC	0299054	3/4 QC X 3/4 FIP	24"

*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: No. Andover, MA • Tel. (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
 Canada: Burlington, ONT. • Tel. (905) 332-4090 • Fax: (905) 332-7068 • www.wattscanada.ca

