For Non-Health Hazard Applications

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative



Series 611 Valve Setter Mechanical Joint

by Mechanical Joint Size: 3" - 10" (80-250mm)

The FEBCO 611 Series Mechanical Joint by Mechanical Joint valve setter is constructed of fusion epoxy coated ductile iron. Valve setters are designed to augment the installation of the "N" series backflow prevention valves. Integral ductile iron support between elbows transfers thrust downstream, thus eliminating thrust block requirements between elbows. Mechanical joint restraint devices may be used at pipe connections, depending on local conditions. The 611 features Lead Free* construction to comply with Lead Free* installation requirements.

Features

- Corrosion resistant fusion epoxy coated.
- Eliminates the need for thrust blocks or other restraints at the point of installation.
- Flanges: ANSI AWWA C153 A21.53-88.

Pressure – Temperature

Maximum Working Pressure:	175psi (12.1 bar)
Temperature Range:	32°F to 140°F (0°C to 60°C)

Materials

Body:	Ductile iron A536 GR 65-45-12
Coating:	Fusion epoxy coated internal and external AWWA C550


Bolts & Nuts: Stainless steel

NOTICE

Mechanical joint assessories, flange bolts and gaskets are not included (except for center joint).



611 MJ X MJ

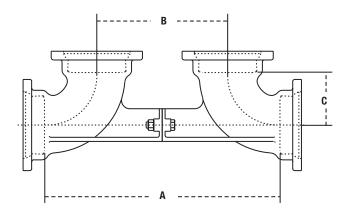

Dimensions – Weights

Size: 3" - 10" (80 - 250mm)

SIZE	(DN)	DIMENSIONS					WEIGHTS		
			A	В		С			
in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.
3	80	21½	546	12 ½	318	41/2	114	69	31
4	100	24	610	14	356	5	127	96	44
6	150	29	737	16	406	6½	165	152	69
8	200	331/2	851	18 ½	470	71⁄2	191	216	98
10	250	40	1016	21	533	9 ½	241	288	131
-									

NOTICE

Dimensions shown are nominal. Allowances must be made for normal manufacturing tolerances.

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

FEBC0 product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact FEBC0 Technical Service. FEBC0 reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on FEBC0 products previously or subsequently sold.



A WATTS Brand

NOTICE

Inquire with governing authorities for local installation requirements

USA: Tel: (800) 767-1234 • Fax: (800) 788-4491 • FEBCOonline.com Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • FEBCOonline.ca Latin America: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • FEBCOonline.com ES-F-611MJ 1330