

For Commercial and Residential Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LFCDC-S Braided Stainless Steel Water Supply Connectors for Dishwashers

Sizes: 3/8" to 3/4" (10 to 19mm)

Series LFCDC-S Braided Stainless Steel Water Supply Connectors for Dishwashers are used in residential and commercial applications, specifically for hookups to the dishwasher water supply. These Lead Free* connectors provide full flow capacity, protection from vibration and bursting under extreme pressure surges, and superior resistance to chlorinated water. Series LFCDC-S connectors consist of PVC tubing jacketed with braided stainless steel and come with elbow fittings. Various end connections are available. The LFCDC-S features Lead Free* construction to comply with Lead Free* installation requirements.

Features

- Available in lengths: 48", 60", and 72" (900, 1500, or 1800mm)
- Tubing
 - PVC body
 - Braided stainless steel jacket
- Brass compression end fittings (Model LFCDC-S-CE only)
- Brass female iron pipe threaded connectors (Model LFCDC-S- FE only)
- Brass male iron pipe thread elbow fittings

Standards

NSF Listed

UPC Listed



LFCDC-S-CE

Models

- LFCDC-S-CE** - Supplied with a plated, solid brass nut compression end fittings at both ends of the flexible connector and a brass male iron pipe thread elbow fitting.
- LFCDC-S-FE** - Supplied with a plated, solid brass nut female iron pipe thread connector at one end of the flexible connector and a brass male iron pipe thread elbow fitting attached to compression end fitting at the other end of the flexible connector.

Pressure-Temperature

Maximum Working Pressure: 125psi (8.6 bar)

Maximum Temperature: 180°F (82°C)

Materials

Tubing:

Body: PVC



Jacket: Stainless steel

Fittings: Brass

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

Dimensions

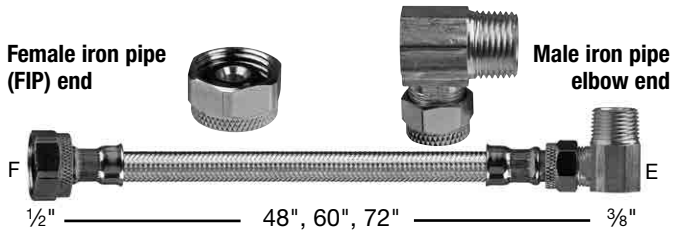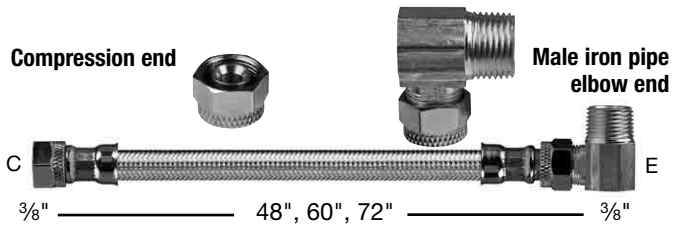

PRODUCT NO.	SIZE	INDIVIDUAL WGT. (LBS.)
LF CDC-S-CE	3/8" x 3/8" x 48"	0.50
LF CDC-S-CE	3/8" x 3/8" x 60"	0.80
LF CDC-S-CE	3/8" x 3/8" x 72"	1.10
LF CDC-S-FE	1/2" x 3/8" x 48"	0.50
LF CDC-S-FE	1/2" x 3/8" x 60"	0.80
LF CDC-S-FE	1/2" x 3/8" x 72"	1.10



A Watts Water Technologies Company



ISO 9001-2008
CERTIFIED

USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca