

For Commercial and Residential Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LFCIC-P Flexible Reinforced PVC Water Supply Connectors for Ice Makers

Sizes: 1/4" (8mm)

Series LFCIC-P Flexible Reinforced PVC Water Supply Connectors for Ice Makers are used in residential and commercial applications, specifically for hookups to the icemaker water supply on refrigerators. These connectors provide protection from vibration and bursting under extreme pressure surges. Their flexibility also facilitates the moving of a refrigerator without danger or permanent damage from kinked copper tubing. Series LFCIC-P consists of PVC tubing jacketed with polyester knitted nylon, protective PVC outer layer, and permanently attached, brass, compression end fittings. The LFCIC-P features Lead Free* construction to comply with Lead Free* installation requirements.

Features

- Available in lengths: 6ft, 10ft, or 20ft (1800, 3100, or 7000mm)
- Tubing
 - PVC
 - Polyester knitted nylon jacket
 - Protective PVC outer layer
- Brass compression end fittings and barbs
- Convenient for difficult installations

Approvals

- Hoses are NSF 61 approved for safer drinking water

Standards

NSF and UPC Listed



Pressure-Temperature

Maximum Working Pressure: 125psi (8.6 bar)

Maximum Temperature: 140°F (60°C)

Note: National residential plumbing codes reference the maximum operating temperature as 140°F (60°C). Plumbing fixtures are designed to ANSI—ASME A112 18.1 at 125psi.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

ISO 9001-2008
CERTIFIED



USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca

ES-LFCIC-P 1313




LFCIC-P-CC

Models

LFCIC-P - All models are supplied with solid brass compression end fittings.

Dimensions

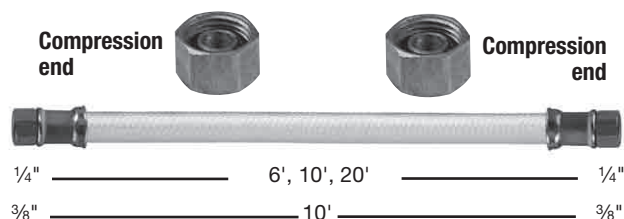

PRODUCT NO.	SIZE	INDIVIDUAL WGT. (LBS.)
LFCIC-P	1/4" x 1/4" x 6'	0.80
LFCIC-P	1/4" x 1/4" x 10'	1.40
LFCIC-P	1/4" x 1/4" x 20'	2.50

Materials

Tubing:
 Body: PVC
 Jacket: PVC
 Fittings: Brass

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

WATTS®

A Watts Water Technologies Company