

## For Commercial and Residential Applications

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# LEAD FREE\*

## Series LFCIC-S

### Flexible Braided Stainless Steel Supply Connectors for Ice Makers

**Sizes:** 1/4" (8mm)

Series LFCIC-S Flexible Stainless Steel Water Supply Connectors for Ice Makers are used in residential and commercial applications, specifically for hookups to the icemaker water supply on refrigerators. These connectors provide protection from vibration and bursting under extreme pressure surges. Their flexibility also facilitates the moving of a refrigerator without danger or permanent damage from kinked copper tubing. Series LFCIC-S consists of PVC tubing jacketed with polyester knitted nylon, protective Stainless steel outer layer, and permanently attached, brass, compression end fittings. The LFCIC-S features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Features

- Available in lengths: 6ft, 10ft, or 20ft (1800, 3100, or 7000mm)
- Tubing
  - PVC
  - Braided stainless steel jacket
- Brass compression end fittings and barbs
- Convenient for difficult installations

### Approvals

- Hoses are NSF 61 approved for safer drinking water

### Standards

NSF and UPC Listed



### Pressure-Temperature

Maximum Working Pressure: 125psi (8.6 bar)

Maximum Temperature: 180°F (82°C)

**Note:** National residential plumbing codes reference the maximum operating temperature as 140°F (60°C). Plumbing fixtures are designed to ANSI-ASME A112.18.1 at 125psi.




LFCIC-S-CC

### Models

**LFCIC-S** - All models are supplied with solid brass compression end fittings.

### Dimensions

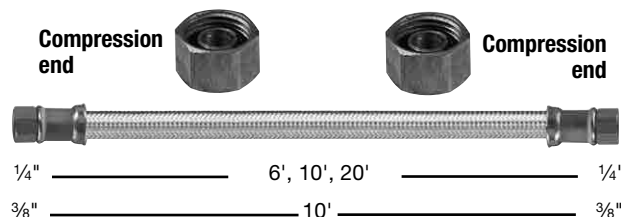

PRODUCT NO.	SIZE	INDIVIDUAL WGT. (LBS.)
LFCIC-S	1/4" x 1/4" x 12"	.17
LFCIC-S	1/4" x 1/4" x 6'	.80
LFCIC-S	1/4" x 1/4" x 10'	1.40
LFCIC-S	1/4" x 1/4" x 20'	2.50

### Materials

Tubing:  
 Body: PVC  
 Jacket: Stainless Steel  
 Fittings: Brass

**\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.**

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

ISO 9001-2008  
CERTIFIED



USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com  
 Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca

ES-LFCIC-S 1405

**WATTS®**

A Watts Water Technologies Company

© 2014 Watts