

For Commercial & Residential Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____


Contractor's P.O. No. _____

Approval _____

Representative _____

Latex Tubing

This natural latex tubing maintains its flexibility under extreme temperatures from subzero to high steam application. Its elastic properties are unaffected by repeated stretching and pulsing. A smooth outer and inner surface offers good flow characteristics and strong fitting retention.

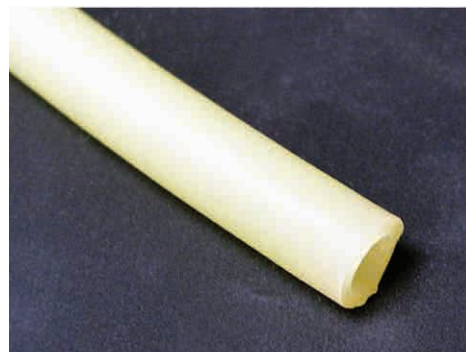

Applications

- Drain tubes
- Elastic bands
- Photographic chemicals
- Shock absorbers

⚠ WARNING

Not intended for use with potable water.

Minimum Operating Temperature	-65°F (-53°C)
Maximum Operating Temperature	180°F (82°C)
Material	Natural Latex Rubber
Color	Amber
Hardness	Durometer, Shore A 35+/-5
Toxicity	FDA Listed Materials
Elongation	750%

Packaging

Dispenser spools

Pressure Range

O.D. INCH	I.D. INCH	WALL	WORKING PRESSURE (PSI @ 70°F)
3/8	1/4	1/16	5psi

NOTICE

Not rated for static pressure retention

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca



A Watts Water Technologies Company