

## For Commercial and Medical Applications

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# LEAD FREE\*

## Models OF817-8H, OF817-12H,

## OF1019-20H

### OneFlow® Anti-Scale System For Hot Water

Connection Sizes: 1" (25mm)

Flow Rates: 8 gpm to 20 gpm (30 lpm to 75.7 lpm)

The OneFlow® Anti-Scale System for hot water provides protection from scale formation on internal surfaces where the hot water feed line is being further heated (booster heater) or brought to steam (steam generator, autoclave).

The OneFlow® system uses specially designed components to work in applications where the water is heated between 100°F – 140°F (38 - 60°C) but has not yet been treated for scale control. These types of applications typically involve protecting and extending the life of equipment and instruments from the damaging effects of hard water scale.

OneFlow® prevents scale by transforming dissolved hardness minerals into harmless, inactive microscopic crystal particles. These crystals stay suspended in the water and are passed to drain thereby having a greatly reduced ability to react negatively, like dissolved hardness does, particularly in high temperature applications where scale formation is accelerated. The system requires very little maintenance, no backwashing, no salt and no electricity. Typical hardness problems, especially build-up of scale in boilers and steamers are no longer a concern.

OneFlow® is not a water softener. It does not add chemicals or remove any minerals. It is a scale prevention device with proven third party laboratory test data and years of successful Commercial and Medical applications. OneFlow® is the one water treatment device that effectively provides scale protection and is a great salt free alternative to other scale treatment devices.

#### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



OF817-8H

OF1019-20H



One Flow media is certified by the Water Quality Association (WQA) to NSF/ANSI Standards 42, 61, and 372.

#### Features

- Chemical free scale prevention and protection - converts hardness minerals to harmless, inactive microscopic crystals
- Virtually maintenance free - No salt bags or other chemicals to constantly add or maintain
- No control valve, no electricity and no wastewater
- System and components designed to work specifically with hot water applications
- Uses environmentally friendly technology
- Improves efficiency of all hot water boosting or steam generating equipment
- Simple sizing and installation – all you need to know is pipe size and flow rate
- Built-in bypass valve provides flexibility for off-line service or media replacement
- OneFlow® does not add anything to the water
- Long life media requires replacement once every three years
- Effective retro-fit technology where scale control was not previously considered.

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

## Models

Model	Maximum Flow Rate	Connection Sizes
OF817-8H	8 gpm (30.4 lpm)	1" (25mm) FNPT bypass
OF817-12H	12 gpm (45.6 lpm)	1" (25mm) FNPT bypass
OF1019-20H	20 gpm (76 lpm)	1" (25mm) FNPT bypass

## Replacement Media

OF817-8HRM	Media must be replaced every 3 years
OF817-12HRM	Media must be replaced every 3 years
OF1019-20HRM	Media must be replaced every 3 years

## Specifications

A OneFlow® scale prevention system for hot water shall be installed on the hot water feed line just prior to the equipment it is intended to protect. The temperature of the hot water feed line should consistently range between 100°F – 140°F (or 38°C – 60°C) as all of the components are designed to work in this elevated temperature condition. The OneFlow® system shall effectively reduce water hardness scale concerns thereby protecting heat-transfer and other surfaces from the negative effects of scale. The system shall be plumbed with a bypass valve to allow isolation of tank(s) and to allow the bypass of untreated hot water in the event that service or media replacement be necessary. The installation area should be suitable in size for the tank(s) to be serviced without encumbrance and for the tank to sit upright on a flat level surface.

The system must not require backwashing, regeneration or any need to discharge water once put into service. The system must not require any chemical additives and must not require electricity for operation. The system must operate in an up-flow manner to minimize any pressure drop.

### NOTICE

Not for use on closed loop systems.

## Standards

Independent scientific testing has confirmed Template Assisted Crystallization (TAC) technology provides scale reduction of over 95+%. Testing was conducted under protocol based on DVGW W512 test to access control of scale formation.

## Dimensions

Model	Dimensions										Weight							
	A		B		C		D		E		F		G		H		lbs.	kgs
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		
OF817-8H	20	508	18½	472	8½	216	1¾	36	10	254	2	51	6	152	4¼	108	15	6.8
OF817-12H	20	508	18½	472	8½	216	1¾	36	10	254	2	51	6	152	4¼	108	16	7.3
OF1019-20H	22	559	20%	523	10½	267	1¾	36	11	279	2	51	6	152	4¼	108	26	11.8

## Feed Water Chemistry Requirements:


pH	6.5-8.5
Hardness (maximum)	75 grains (1282 ppm CaCO3)
Water Pressure	15 psi to 100 psi (1.03 bar to 6.9 bar)
Temperature	100° F to 140° F (38°C to 60°C)
Free Chlorine	<2 ppm
Iron (maximum)	0.3 ppm*
Manganese (maximum)	0.05 ppm*
Copper	1.3 ppm**
Oil & H2S	Must be Removed Prior to OneFlow
Silica (maximum)	20 ppm***

### WARNING

\*\*Copper  
Pursuant to the EPA drinking water standards, the copper concentration permitted is up to 1.3 ppm. Typically originating from new copper plumbing, high levels of copper can foul OneFlow media. For applications with copper concentration greater than 1.3 ppm, please contact Watts Pure Water Technical Service at 1-800-224-1299. To further minimize any problem with excess copper, avoid applying excessive flux on the inner surfaces of the pipe and use a low-corrosivity water soluble flux listed under the ASTM B813 standard.

### NOTICE

\*\*\*Silica  
OneFlow® media does not reduce silica scaling. While silica tends to have a less significant effect on scale formation than other minerals, it can act as a binder that makes water spots and scale residue outside the plumbing system difficult to remove. This 20 ppm limitation is for aesthetic purposes.

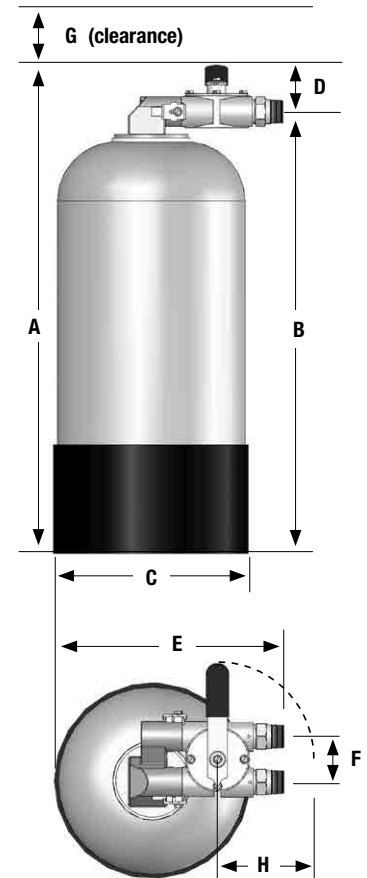

USA: T: (978) 689-6066 • F: (978) 975-8350 • Watts.com  
Canada: T: (905) 332-4090 • F: (905) 332-7068 • Watts.ca  
Latin America: T: (52) 81-1001-8600 • Watts.com