

# T11 Tank Order - Submittal Sheet

Job Name \_\_\_\_\_

Contractor Signature \_\_\_\_\_

Job Location \_\_\_\_\_

Approval Date \_\_\_\_\_

Orion Representative \_\_\_\_\_


Contractor's P.O. No. \_\_\_\_\_

**All Tank/SI Drawings Must Be Signed Off And Accompany PO Before Product Will Be Manufactured.**

## T11 Anti-Siphon Dilution Trap

### Specification

Orion T11 POU Anti-Siphon Dilution Trap vessel shall be cylindrical seamless, stress and defect free, rotationally molded construction to uniform wall thickness from virgin PE resins conforming to ASTM D 1248. Trap vessel shall be 1, 2, or 5 USG capacity. Trap top assembly shall be threaded and gasketed to vessel, and shall have **height adjustable top FIP inlet with dip tube and fixed side MIP outlet.**

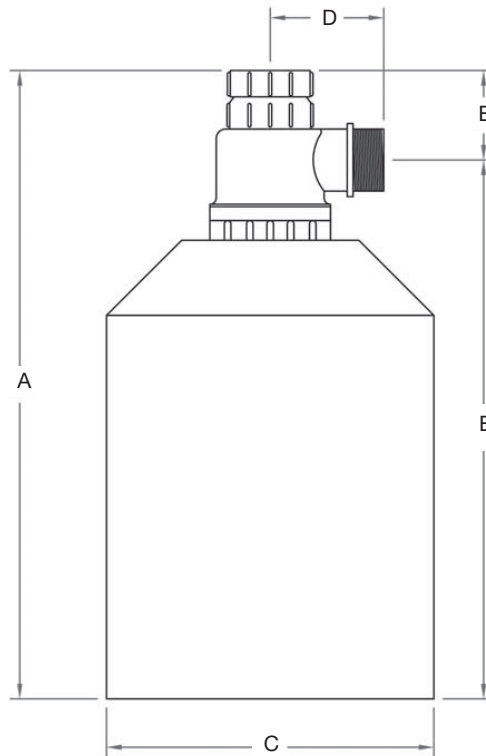

**Note:** Tanks are made to  $\pm 0.25$  in. tolerance.

**NOTICE**

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Dimensional Chart							
Check Box	Gallons	A In.	B In.	C In.	D In.	E Max.	E Min.
<input type="checkbox"/>	1	10.75"	7.50"	7.50"	2.88"	2.50"	7.50"
<input type="checkbox"/>	2	17.00"	14.25"	7.50"	2.88"	3.50"	13.50"
<input type="checkbox"/>	5	19.50"	17.00"	11.50"	2.88"	3.50"	13.50"

**Please verify all selections with your local Orion rep - tank products and accessory equipment are non-returnable.**

Orion Fittings product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Orion Fittings Technical Service. Orion Fittings reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Orion Fittings products previously or subsequently sold.



**USA:** T: (800) 334-6259 • OrionFittings.com  
**Canada:** T: (905) 332-4090 • F: (905) 332-7068 • OrionFittings.ca  
**Latin America:** T: (52) 81-1001-8600 • OrionFittings.com

**A WATTS Brand**