

# T15 Tank Order - Submittal Sheet

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Orion Representative \_\_\_\_\_

Contractor Signature \_\_\_\_\_  
 Approval Date \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_

**All Tank Drawings Must Be Signed Off And Accompany PO Before Product Will Be Manufactured.**

## T15 Bolted Top Decontamination Tank

### Specification

Orion T15 shall be cylindrical, seamless, stress and defect free, rotationally molded construction to uniform wall thickness from virgin PE resins conforming to ASTM D 1248, with **single FIP inlet and vent only as standard.** All penetrations shall be heat fused to tank wall. **Standard non-load bearing tank cover shall be gasketed and bolted to tank.**

### Tank Size

Selection Check One	Dimensions (in.)				
	Capacity USG	Ht. (A)	Dia. (B)	Cover Dia.	Std. In/Vent Size (in.)
<input type="checkbox"/>	150	16.25	11	16	2/2
<input type="checkbox"/>	200	15.5	17.25	22.25	3/2
<input type="checkbox"/>	275	30.5	17.25	22.25	3/2
<input type="checkbox"/>	360	33.5	22.5	27.5	3/2
<input type="checkbox"/>	500	49	24	29	4/3
<input type="checkbox"/>	600	48	30	35	4/3
<input type="checkbox"/>	1200	42	36	41	4/3

Connection, Cover, Support & Access Options			
<input type="checkbox"/>	No Hub Connections	<input type="checkbox"/>	4" Cleanout Access
<input type="checkbox"/>	Flanged Connections	<input type="checkbox"/>	6" Cleanout Access
<input type="checkbox"/>	3/4" Plastic Cover	<input type="checkbox"/>	12" Gamma Top Access
<input type="checkbox"/>	1/8" Steel x 3/4" Plastic Cover	<input type="checkbox"/>	16" Gamma Top Access
<input type="checkbox"/>	1/4" Steel x 3/4" Plastic Cover	<input type="checkbox"/>	20" x 1/2" Bolted Access
<input type="checkbox"/>	Tank Anchor Flange	<input type="checkbox"/>	20" x 3/4" Bolted Access
<input type="checkbox"/>	Reinforcing Anchor Flange	<input type="checkbox"/>	24" x 1/2" Bolted Access
<input type="checkbox"/>	Fiberglass Wrap*	<input type="checkbox"/>	24" x 3/4" Bolted Access
<input type="checkbox"/>	Ball Valve Outlet (Internal)	<input type="checkbox"/>	Ball Valve Outlet (External)
<input type="checkbox"/>	S.S. Ball Valve (Internal) Handle Ext.	<input type="checkbox"/>	High Liquid Level Alarm

**\* CALIFORNIA PROP 65 WARNING:** This product can expose you to chemicals including benzene which is known to the State of California to cause cancer and birth defects or other reproductive harm. **For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).**

### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Orion Fittings product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Orion Fittings Technical Service. Orion Fittings reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Orion Fittings products previously or subsequently sold.

**USA:** T: (800) 334-6259 • OrionFittings.com  
**Canada:** T: (905) 332-4090 • F: (905) 332-7068 • OrionFittings.ca  
**Latin America:** T: (52) 81-1001-8600 • OrionFittings.com

### Connection Locations/Sizes

**Standard Locations:**

Inlet-at 9:00 and centered 5" down from the top of the tank rim  
 Vent-at 6:00 & centered 4" down from top of tank rim



**Custom locations:**

Indicate desired locations in the small circles of the top-view diagram below.  
 I-Inlet O-Outlet V-Vent

**Custom Sizes:**


Indicate 2", 3", 4", or 6" in corresponding connection-type box.

Inlet  Outlet  Vent

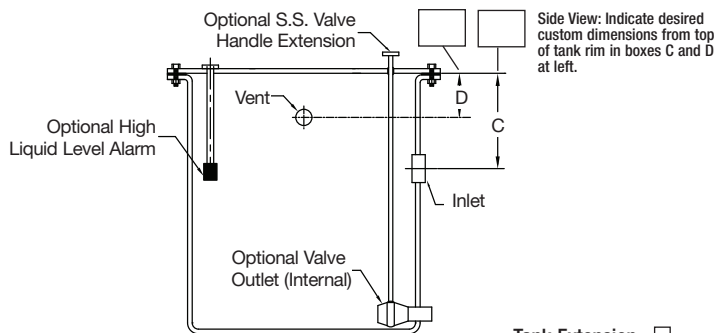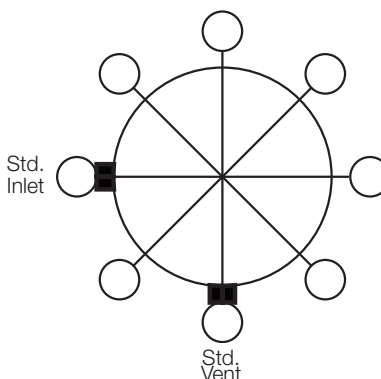

**Tank Extension**

If C dimension exceeds standard 5" for a buried tank, an extension may be required to maintain effective tank capacity or easy access. Please check extension option box above. Extension height will be verified by Orion Technical Support.



Note: Tanks are made to ±0.25 in. tolerance.

**Please verify all selections with your local Orion rep - tank products and accessory equipment are non-returnable.**



**A WATTS Brand**