

T17 Tank Order - Submittal Sheet

Job Name _____
 Job Location _____
 Orion Representative _____

Contractor Signature _____
 Approval Date _____
 Contractor's P.O. No. _____

All Tank Drawings Must Be Signed Off And Accompany PO Before Product Will Be Manufactured.

T17 Bolted Top Solids Interceptor

Specification

Orion T17 solids interceptor shall be cylindrical, seamless, stress and defect free, rotationally molded construction to uniform wall thickness from virgin PE resins conforming to ASTM D 1248, with **single FIP inlet, outlet and vent as standard.** Solids interceptor shall come with removable PE interior basket with 1/8" diameter mesh perforations and solids retention basket bottom and basket handle. Solids interceptor shall be equipped with means of securing basket in place with tank inlet extending into basket. **Standard non-load bearing cover shall be gasketed and bolted to tank.**

Tank Size

Selection	Dimensions (In.)							Std. Vent Size	Std. Inlet/Outlet
	Check One	Cap. USG	Tank Ht.	Inside Dia.	In	Out	Vent		
<input type="checkbox"/>	5	16	11	6	11	4	2	2	
<input type="checkbox"/>	15	15	17	6	11	4	2	3	
<input type="checkbox"/>	55	44	23	8	24	4	2	3	

Connection, Cover, Support & Access Options			
<input type="checkbox"/>	No Hub Connections	<input type="checkbox"/>	4" Cleanout Access
<input type="checkbox"/>	Flanged Connections	<input type="checkbox"/>	6" Cleanout Access
<input type="checkbox"/>	3/4" Plastic Cover	<input type="checkbox"/>	12" Gamma Top Access
<input type="checkbox"/>	1/8" Steel x 3/4" Plastic Cover	<input type="checkbox"/>	16" Gamma Top Access
<input type="checkbox"/>	1/4" Steel x 3/4" Plastic Cover	<input type="checkbox"/>	20" x 1/2" Bolted Access
<input type="checkbox"/>	Tank Anchor Flange	<input type="checkbox"/>	20" x 3/4" Bolted Access
<input type="checkbox"/>	Reinforcing Anchor Flange	<input type="checkbox"/>	24" x 1/2" Bolted Access
<input type="checkbox"/>	Fiberglass Wrap*	<input type="checkbox"/>	24" x 3/4" Bolted Access

*** CALIFORNIA PROP 65 WARNING:** This product can expose you to chemicals including benzene which is known to the State of California to cause cancer and birth defects or other reproductive harm. **For more information go to www.P65Warnings.ca.gov.**

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Orion Fittings product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Orion Fittings Technical Service. Orion Fittings reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Orion Fittings products previously or subsequently sold.

USA: T: (800) 334-6259 • OrionFittings.com
Canada: T: (905) 332-4090 • F: (905) 332-7068 • OrionFittings.ca
Latin America: T: (52) 81-1001-8600 • OrionFittings.com

Connection Locations/Sizes

Standard Locations:

Inlet-at 9:00 and centered per tank size chart.
 Outlet-at 3:00 and centered per tank size chart.
 Vent-at 6:00 and centered per tank size chart.



Custom locations:

Indicate desired locations in the small circles of the top-view diagram below.
 I-Inlet O-Outlet V-Vent

Custom Sizes:

Indicate 2", 3", 4", or 6" in corresponding connection-type box.

Inlet Outlet Vent

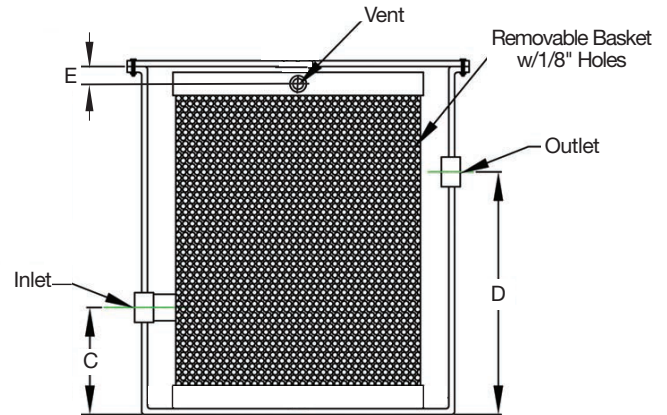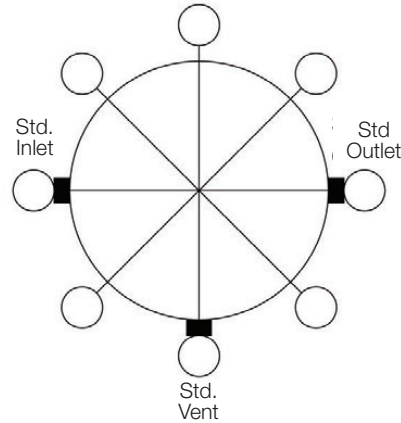

Note: Tanks are made to ±0.25 in. tolerance.

Please verify all selections with your local Orion rep - tank products and accessory equipment are non-returnable.



A WATTS Brand