

For Commercial & Residential Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____


Contractor's P.O. No. _____

Approval _____

Representative _____

Pump & Bilge Discharge Hose

This bilge and pump hose design incorporates corrugated, ultra-low density polyethylene that allows high operating temperature stability.

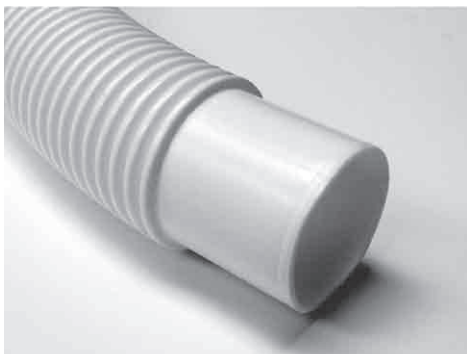

Attributes

- Excellent tear strength and high impact puncture resistance
- It features molded cuffs every 3' for easy use with additional fittings

Applications

- Marine applications
- Sump Pump
- Discharge operations where no vacuum is present



WARNING: Not intended for use with potable water.

Operating Temperature Range 5°F (-21°C) to 150°F (66°C)
 Material Low Density Polyethylene
 Color White

Packaging

Dispenser spools

Pressure Range

O.D. INCH	I.D. INCH	WALL	WORKING PRESSURE (PSI @ 70°F)
1	3/4	1/8	N/A
1-5/8	1-1/8	1/4	N/A
1-3/4	1-1/4	1/4	N/A
2	1-1/2	1/4	N/A

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com
Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca

A Watts Water Technologies Company