

**For Non-Health Hazard Applications**

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_  
 Job Location \_\_\_\_\_ Approval \_\_\_\_\_  
 Engineer \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_  
 Approval \_\_\_\_\_ Representative \_\_\_\_\_


**LEAD FREE\***

## Relief Valve Discharge Rates

Models LF860, LF866, LF880V, and LF886V

Reduced Pressure Zone Assemblies

Size: †2½"-10"

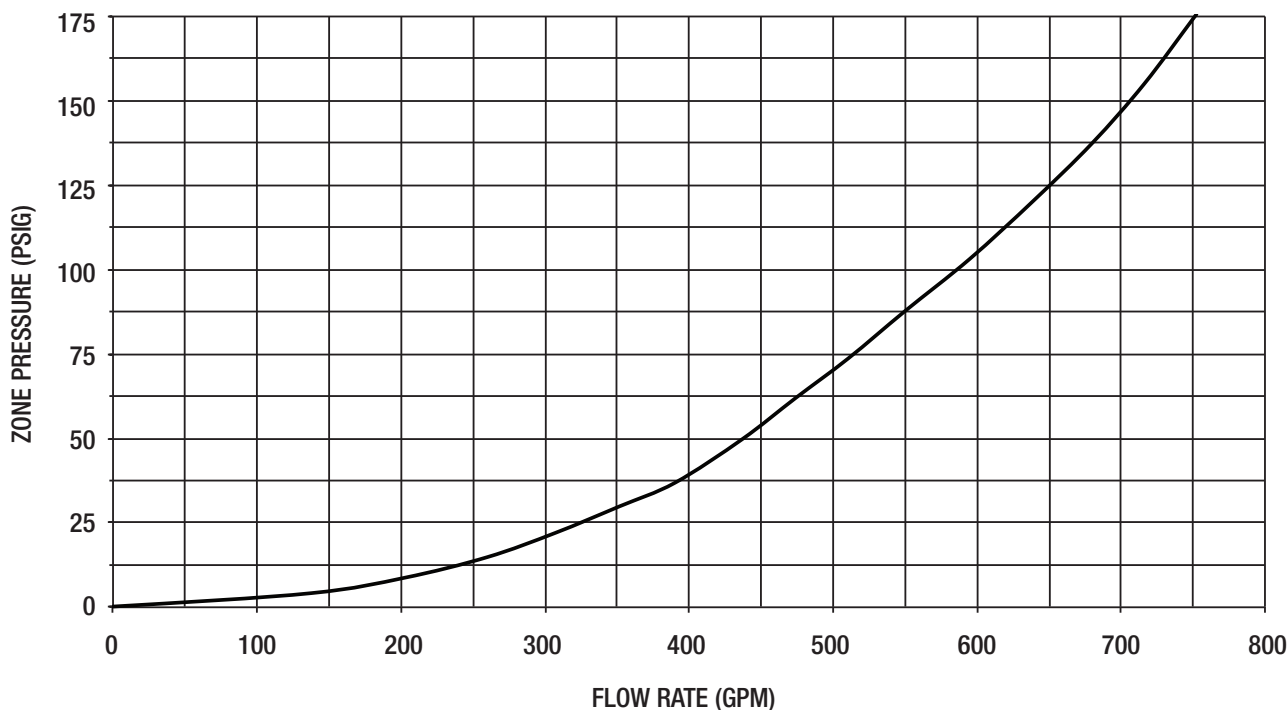

†Common Relief Valve Module for all Assemblies.

Typical Flow Rates as Sized by Floor Drain MFG.\*

- 2" - 55 GPM
- 3" - 112 GPM
- 4" - 170 GPM
- 5" - 350 GPM
- 6" - 450 GPM
- 8" - 760 GPM

\* Floor drain capacities are established by the floor drain manufacturers and are not recommendations of FEBCO. Consult local codes to insure drain installation meets all requirements.

FEBCO product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact FEBCO Technical Service. FEBCO reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on FEBCO products previously or subsequently sold.



**A WATTS Brand**