

For Commercial & Residential Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Spa Flex Hose

Manufactured from rigid PVC spiral helix make spa-flex strong, flexible and easy to handle.

Attributes

Conforms to any shape or contour, and is specifically sized to be glued over barbs or into standard PVC fitting.

Applications

- Spas
- Suction Hose
- Jetted Tubs
- Vacuum Discharge Hose
- Whirlpools



WARNING: Not intended for use with potable water.

Operating Temperature Range -5°F (-21°C) to 150°F (66°C)

Material PVC with rigid PVC helix

Color White


Bend Radius 3" – 5"

Packaging

Dispenser spools

Pressure Range

O.D. INCH	I.D. INCH	WALL	WORKING PRESSURE (PSI @ 70°F)
0.84	1/2	1/8	100
1.05	3/4	1/8	100
1.31	1	1/8	100
1.66	1-1/4	1/8	80
1.9	1-1/2	1/8	65
2-1/4	2	1/8	65

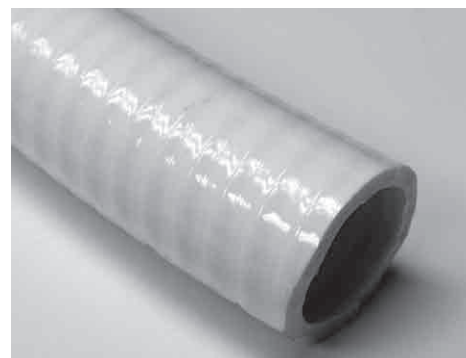

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca



A Watts Water Technologies Company