

For Commercial & Residential Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

LEAD FREE*

Dual Handle Water Supply Stops

The Lead Free* Multi-port Stops are constructed to comply with Lead Free* installation requirements.

Features

- Available in straight and angle configurations
- Certified to NSF/ANSI 61 Section 9-G
- IAPMO Listed
- Lead Free* brass

Pressure and Temperature

Maximum Pressure: 125psi / 8.6 bar
 Maximum Temp: 160°F / 71.1°C

Approvals



Certified to NSF/ANSI 61 Section 9-G





C



Straight Stop



Angle Stop

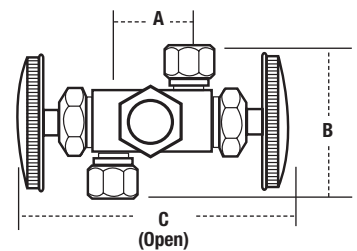

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

LEAD FREE	MODEL	✓ TO SUBMIT	TYPE	DESCRIPTION	DIMENSIONS						FINISH
					A		B		C		
					in.	mm	in.	mm	in.	mm	
	LFDV389411		Straight	5/8" OD Comp x 3/8" OD Comp x 3/8" OD Comp	1 3/8	36	2 1/2	64	4 3/8	110	Rough Brass
	LFDV389400		Angle	5/8" OD Comp x 3/8" OD Comp x 3/8" OD Comp	1 3/8	36	2 1/2	64	4 3/8	110	Rough Brass
	LFDV389431		Angle	5/8" OD Comp x 3/8" OD Comp x 1/4" OD Comp	1 3/8	36	2 1/2	64	4 3/8	110	Rough Brass
	LFDV389403		Angle	5/8" OD Comp x 3/8" OD Comp x 3/8" OD Comp	1 3/8	36	2 1/2	64	4 3/8	110	Chrome

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
 Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca



A Watts Water Technologies Company