

For Commercial & Residential Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*
Multi-Turn Water Supply Stops

The Lead Free* Multi Turn Water Supply Stops are constructed to comply with Lead Free* installation requirements.

Features

- Available in straight and angle configurations
- Certified to NSF/ANSI 61 Section 9-G
- IAPMO Listed
- Lead Free* brass

Pressure — Temperature



Maximum Pressure: 125psi (8.6 bar)

Maximum Temperature: 160°F (71.1°C)

Approvals




*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

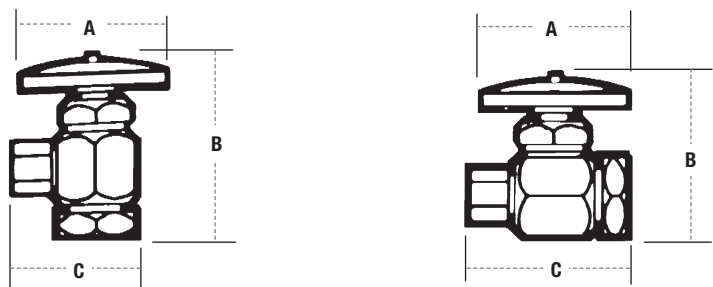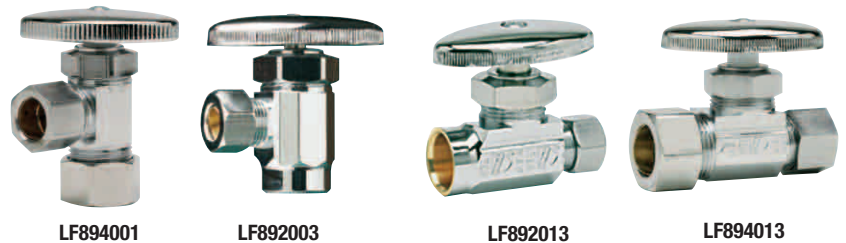

MODEL	✓ TO SUBMIT	TYPE	DESCRIPTION	DIMENSIONS						FINISH
				A		B		C		
				in	mm	in	mm	in	mm	
IPS Inlet										
LF889003		Angle	3/8" x 3/8" OD Comp	2	51	2 3/8	60	1 7/16	36	Chrome
LF889003LK		Angle	3/8" x 3/8" OD Comp Loose Key Model	2	51	2 3/8	60	1 7/16	36	Chrome
LF890003		Angle	1/2" x 3/8" OD Comp	2	51	2 1/2	64	1 9/16	39	Chrome
LF890003LK		Angle	1/2" x 3/8" OD Comp Loose Key Model	2	51	2 1/2	64	1 9/16	39	Chrome
LF890203		Angle	1/2" x 1/2" OD Comp	2	51	2 1/2	64	1 3/4	44	Chrome
LF890203LK		Angle	1/2" x 1/2" OD Comp Loose Key Model	2	51	2 1/2	64	1 3/4	44	Chrome
LF890303		Angle	1/2" x 1/2" and 7/16" OD rubber slip joint	2	51	2 1/2	64	1 11/16	42	Chrome
LF890303LN		Angle	1/2" x 1/2" and 7/16" OD rubber slip joint Less Nuts	2	51	2 1/2	64	1 11/16	42	Chrome
LF889013		Straight	3/8" x 3/8" OD Comp	2	51	2 3/16	55	2	51	Chrome
LF890013		Straight	1/2" x 3/8" OD Comp	2	51	2 1/4	57	2 1/16	53	Chrome

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



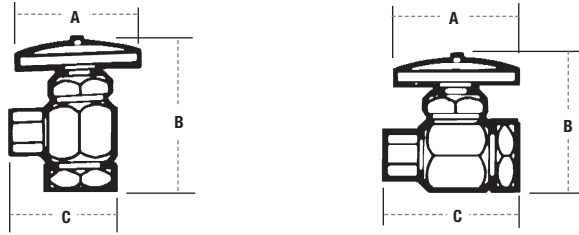

MODEL NO.	✓ TO SUBMIT	TYPE	DESCRIPTION	DIMENSIONS						FINISH
				A		B		C		
				in	mm	in	mm	in	mm	
Barbed Inlet										
LF891203		Angle	1/2" PEX x 3/8" OD Comp	2	51	2 5/8	66	1 7/16	36	Chrome
LF891213		Straight	1/2" PEX x 3/8" OD Comp	2	51	2 3/16	55	2 1/8	54	Chrome
Solder Inlet										
LF892001		Angle	1/2" x 3/8" OD Comp	2	51	2 3/8	61	1 7/16	36	Rough Brass
LF892003		Angle	1/2" x 3/8" OD Comp	2	51	2 3/8	61	1 7/16	36	Chrome
LF892003LK		Angle	1/2" x 3/8" OD Comp Loose Key Model	2	51	2 3/8	61	1 7/16	36	Chrome
LF892151		Angle	1/2" x 1/4" OD Comp	2	51	2 3/8	61	1 7/16	37	Rough Brass
LF892503		Angle	1/2" with 5" extension x 3/8" OD Comp, with deep escutcheon	2	51	7	178	1 7/16	37	Chrome
LF892503LK		Angle	1/2" with 5" extension x 3/8" OD Comp, Loose Key Model	2	51	7	178	1 7/16	37	Chrome
LF892011		Straight	1/2" x 3/8" OD Comp	2	51	2 3/8	61	1 7/16	37	Rough Brass
LF892013		Straight	1/2" x 3/8" OD Comp	2	51	2 3/16	55	2	51	Chrome
LF892513		Straight	1/2" Copper Solder with 5" extension x 3/8" OD Comp, with deep escutcheon	2	51	2 1/4	57	6 3/16	173	Chrome
CPVC Inlet										
LF892401		Angle	5/8" OD CPVC x 3/8" OD Comp	2	51	3 3/8	85	1 7/16	36	Rough Brass
LF892403		Angle	5/8" OD CPVC x 3/8" OD Comp	2	51	3 3/8	85	1 7/16	36	Chrome
LF892411		Straight	5/8" OD CPVC x 3/8" OD Comp	2	51	2 1/8	54	3 1/16	78	Rough Brass
LF892413		Straight	5/8" OD CPVC x 3/8" OD Comp	2	51	2 1/8	54	3 1/16	78	Chrome
Compression Inlet										
LF894001		Angle	5/8" x 3/8" OD Comp	2	51	2 11/16	69	1 7/16	36	Rough Brass
LF894003		Angle	5/8" x 3/8" OD Comp	2	51	2 11/16	69	1 7/16	36	Chrome
LF89400WE		Angle	5/8" x 3/8" OD Comp with escutcheon	2	51	2 11/16	69	1 7/16	36	Chrome
LF894003LK		Angle	5/8" x 3/8" OD Comp Loose Key Model	2	51	2 11/16	69	1 7/16	36	Chrome
LF894151		Angle	5/8" x 1/4" OD Comp	2	51	2 11/16	69	1 7/16	36	Rough Brass
LF894153		Angle	5/8" x 1/4" OD Comp	2	51	2 11/16	69	1 7/16	36	Chrome
LF894203		Angle	5/8" x 1/2" OD Comp	2	51	2 3/4	70	1 9/8	41	Chrome
LF894303		Angle	5/8" x 1/2" and 7/16" OD, rubber slip joint	2	51	2 7/8	73	1 9/16	40	Chrome
LF894011		Straight	5/8" x 3/8" OD Comp	2	51	2 1/2	64	2	51	Rough Brass
LF894013		Straight	5/8" x 3/8" OD Comp	2	51	2 1/2	64	2	51	Chrome



A Watts Water Technologies Company



ISO 9001-2008
CERTIFIED

USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca