

**SPECIFICATION:** Watts Drainage Products CA-402 grey, baked epoxy coated fabricated exposed arms, rectangular steel structural uprights, free-standing design (independent foot supported carrier).



**FUNCTION:** Recommended for support of wall-hung fixtures independent of wall. Exposed arms provide support of fixtures which are not drilled for concealed arms such as semi-countertop lavatories.

**NOTE: FOOT SUPPORTS SHOULD BE SECURELY ANCHORED TO FLOOR WITH 1/2" BOLTS AND ANCHORS BY OTHERS.**

Order Code: **CA-402-**   
**OR CA-402-D-**

Ex. **CA-402-D-M55**

Options (Select One or More)		
Suffix	Description	
-M51	Wall Thickness over 5", per add inch (single)	<input type="checkbox"/>
-M52	Wall Thickness over 12", per inch (Back to Back)	<input type="checkbox"/>
-M53	Vandal Proof Trim, Single	<input type="checkbox"/>
-M59	Floor to Ceiling Adaptor, Single	<input type="checkbox"/>
-M60	Valve Supporting Plate, Single	<input type="checkbox"/>
-M61	Valve Supporting Bar, Single	<input type="checkbox"/>
-M62	Flush Valve Piping Support, Single	<input type="checkbox"/>

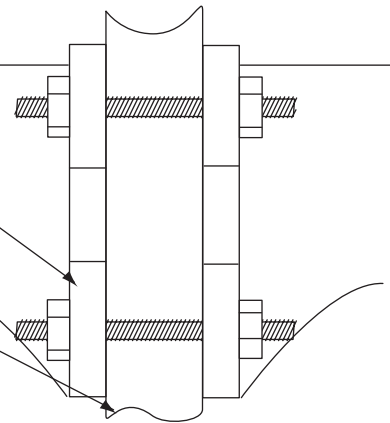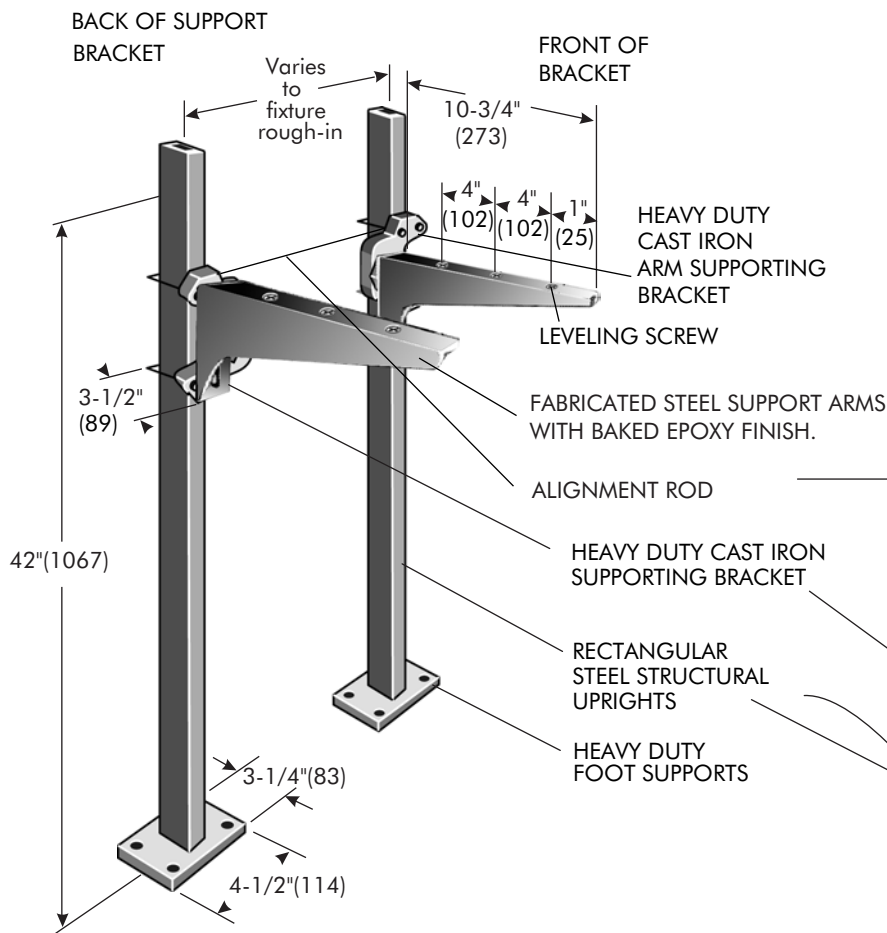

**CA-402-D (DETAIL)**  
 The CA-402-D is furnished with opposed arms mounted on uprights with back to back heavy duty cast iron support brackets

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_

Job Location \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_

Engineer \_\_\_\_\_ Representative \_\_\_\_\_

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.