


FD-200-VS

Floor Drain with Square Hinged Solid Cover

SPECIFICATION: Watts Drainage FD-200-VS on-grade epoxy coated cast iron floor drain with anchor flange, weepholes, adjustable square solid hinged nickel bronze strainer, and no hub (standard) outlet.

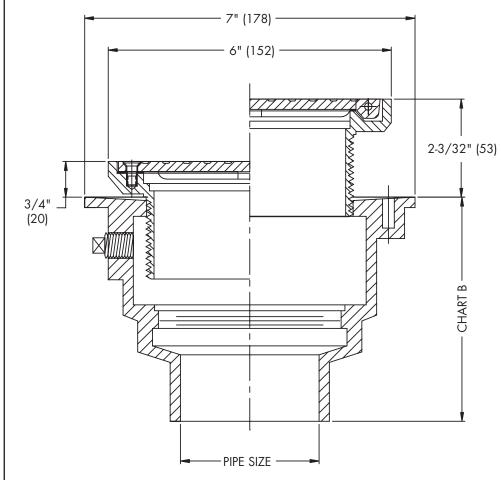

Components	
B4-34	VS-1

Suffix	Pipe Sizing (Select One) Description	
2	2"(51) Pipe Size	
3	3"(76) Pipe Size	
4	4"(102) Pipe Size	

Suffix	Outlet Type (Select One) Description	
NH P	No Hub (M) Push On	

Options (Select One or More)		
Suffix	Description	
-5	Sediment Bucket	
-6	Vandal Proof	
-7	Trap Primer Tapping	
-8	Backwater Valve	
-13	Galvanized Body	
-15	Strainer Extension (DD-50)	
-US	Buy American Compliant	

Optional Body Material		
Suffix	Description	
-60 -61	PVC Body w/Socket Outlet ABS Body w/Socket Outlet	

Load Rating

Suffix	Load Rating	Free Area Sq. In.	
VS	*HD	N/A	

Chart B

	NH(MJ)	Р	60/61
Pipe	No	Push	PVC/
Size	Hub	On	ABS
2"	4-1/2" (114)	5-1/2" (140)	4" (102)
3"	4-1/2" (114)	5-1/2" (140)	4" (102)
4"	4-3/4" (121)	5-1/2" (140)	4" (102)

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows: XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg)

XHD - Sate Live Load /500-10000 lbs.(33/5-4500k The above categories are given as a guide only. Please consult factory.

Job Name	Contractor
Job Location	Contractor's P.O. No
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca

ES-WD-FD-200-VS USA 1304 FD-200-VS