




FD-410

Parking Area Catch Basin

Tag: _____

SPECIFICATION: Watts Drainage FD-410 epoxy coated steel catch basin with anchor flange, 24 1/2" x 24 1/2" (622 x 622) top with loose set heavy duty cast iron grate, and no hub (standard) outlet.

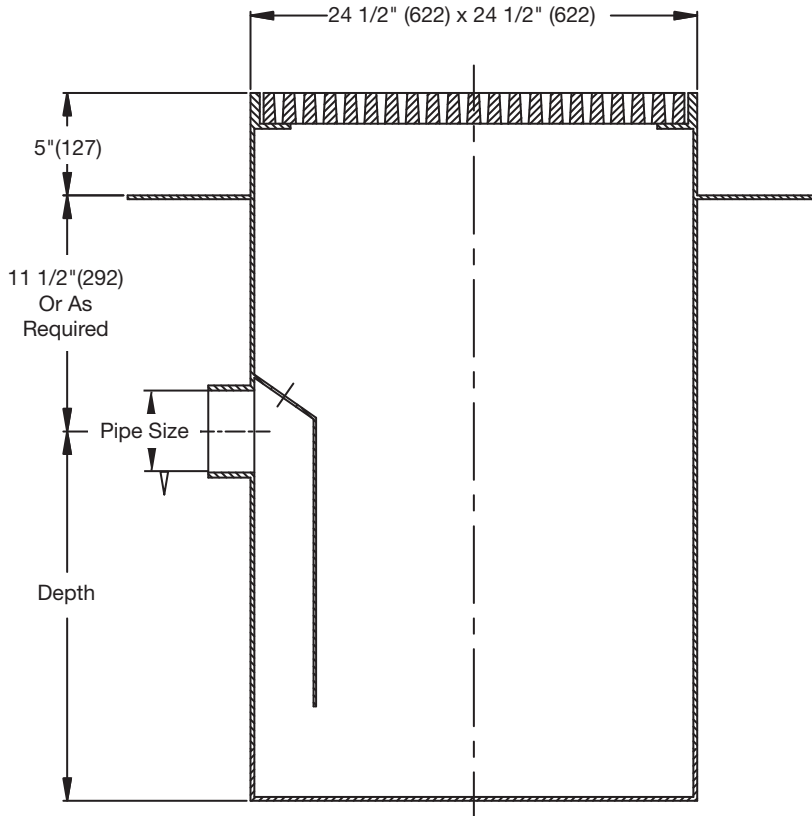

Pipe Sizing (Select One)		
Suffix	Description	
3	3" (76) Pipe Size	<input type="checkbox"/>
4	4" (102) Pipe Size	<input type="checkbox"/>
6	6" (152) Pipe Size	<input type="checkbox"/>

Depth (Select One)		
Suffix	Description	
A	18" (457) Depth	<input type="checkbox"/>
B	24" (610) Depth	<input type="checkbox"/>
C	30" (762) Depth	<input type="checkbox"/>
D	36" (914) Depth	<input type="checkbox"/>
E	Special Depth	<input type="checkbox"/>

Options (Select One or More)		
Suffix	Description	
-6	Vandal Proof	<input type="checkbox"/>
-Q	Special Dimension	<input type="checkbox"/>
-SI	Side Inlet Connection	<input type="checkbox"/>
-ST	Solid Top	<input type="checkbox"/>
-T	Threaded Inlet/Outlet	<input type="checkbox"/>
-US	Buy American Compliant	<input type="checkbox"/>

NOTICE

The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:
 XHD - Safe Live Load 7500-10,000 lbs.(3402-4536 kg)
 The above categories are given as a guide only.
 Please consult factory.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product

Load Rating	Free Area Sq. In.
*XHD	162

Job Name _____
 Job Location _____
 Engineer _____

Contractor _____
 Contractor's P.O. No. _____
 Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca
Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com