


## FD-520

Tag: \_\_\_\_\_

## Large Capacity Side Outlet Parking Area Drain

**SPECIFICATION:** Watts Drainage FD-520 epoxy coated side outlet parking area drain with fabricated steel body, extra heavy duty 24-1/2"x24-1/2"(622x622) two-section ductile iron grate, and no hub (standard) outlet.

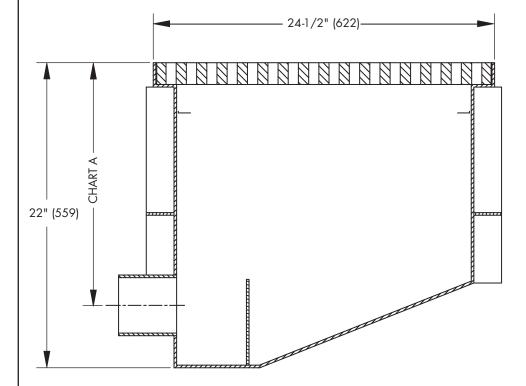

Pipe Sizing (Select One)		
Suffix	Description	
4	4"(102) Pipe Size	
6	6"(152) Pipe Size	
8	8"(203) Pipe Size	

Options (Select One or More)				
Suffix	Description			
-C	Membrane Clamp			
-T	Threaded Outlet			
-5	Sediment Bucket			
-6	Vandal Proof Grate			
-38	Solid Retaining Baffle			
-US	Buy American Compliant			

## Chart A

Outlet	Top to Center		
Size	of Outlet		
4"(102)			
6"(152)			
8"(203)			

## Load Rating & Free Area

Load Rating	Free Area Sq. In.
*XHD	208

\* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:

XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg) The above categories are given as a guide only. Please consult factory.

Job Name	Contractor
Job Location	Contractor's P.O. No.
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com

ES-WD-FD-520 USA 1304 FD-520