




OI

Oil Interceptor

Tag: \_\_\_\_\_

**SPECIFICATION:** Watts Drainage OI Series recessed or floor mounted epoxy coated steel oil interceptor with gasketed epoxy coated steel skid-proof cover secured with hex head center bolt(s), double wall deep seal trap, draw-off connection and dual vent connections, integral stainless steel flow control plate, and no hub (standard) connections.

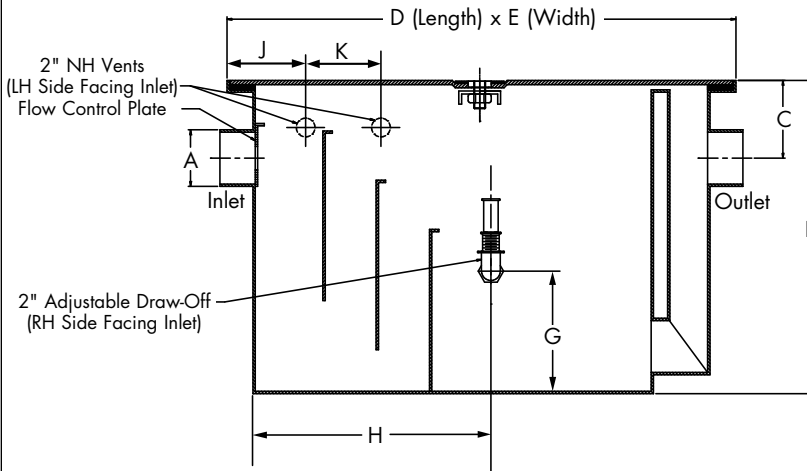

| Flow Rate (Select One) |             |                          |
|------------------------|-------------|--------------------------|
| Suffix                 | Description |                          |
| 10                     | 10 GPM      | <input type="checkbox"/> |
| 15                     | 15 GPM      | <input type="checkbox"/> |
| 20                     | 20 GPM      | <input type="checkbox"/> |
| 25                     | 25 GPM      | <input type="checkbox"/> |
| 35                     | 35 GPM      | <input type="checkbox"/> |
| 50                     | 50 GPM      | <input type="checkbox"/> |

| Options (Select One) |   |                          |
|----------------------|---|--------------------------|
| Suffix               | Description                             |                          |
| -B                   | Sediment Bucket                         | <input type="checkbox"/> |
| -E                   | Extension                               | <input type="checkbox"/> |
| -FC                  | Flange & Clamp Device                   | <input type="checkbox"/> |
| -HD                  | Heavy Duty (10,000 lb.) Traffic Cover*  | <input type="checkbox"/> |
| -O                   | Inlet & Outlet other than Standard Size | <input type="checkbox"/> |
| -SS                  | Stainless Steel                         | <input type="checkbox"/> |
| -THD                 | Threaded Connections                    | <input type="checkbox"/> |

\*-HD Option Requires Minimum 3" Extension

| Interceptor Catalog Number | Flow Rate GPM | A Inlet & Outlet | C Top to Center | D Length     | E Width      | F Height     | G Base to Center | H            | J       | K       |
|----------------------------|---------------|------------------|-----------------|--------------|--------------|--------------|------------------|--------------|---------|---------|
| OI-10                      | 10            | 3"(76)           | 4"(102)         | 22-1/4"(565) | 16-3/4"(425) | 11-1/2"(192) | 3-1/2"(89)       | 11-1/2"(192) | 5"(127) | 4"(102) |
| OI-15                      | 15            | 3"(76)           | 4"(102)         | 22-1/4"(565) | 16-3/4"(425) | 14-1/2"(368) | 5-1/2"(140)      | 11-1/2"(192) | 5"(127) | 4"(102) |
| OI-20                      | 20            | 3"(76)           | 4"(102)         | 27-1/4"(692) | 19-1/4"(489) | 16-1/2"(419) | 6-1/2"(165)      | 14-1/4"(362) | 6"(152) | 5"(127) |
| OI-25                      | 25            | 3"(76)           | 4"(102)         | 27-1/4"(692) | 19-1/4"(489) | 18-1/4"(464) | 9-1/2"(241)      | 14-1/4"(362) | 6"(152) | 5"(127) |
| OI-35                      | 35            | 4"(102)          | 4"(102)         | 33-3/4"(857) | 20-3/4"(527) | 18"(457)     | 9-1/2"(241)      | 18-1/2"(470) | 7"(178) | 6"(152) |
| OI-50                      | 50            | 4"(102)          | 4"(102)         | 33-3/4"(857) | 20-3/4"(527) | 21-1/2"(546) | 13"(330)         | 18-1/2"(470) | 7"(178) | 6"(152) |

**NOTICE**

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Engineer \_\_\_\_\_

Representative \_\_\_\_\_

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com

ES-WD-OI-USA 1712

© 2017 Watts