


RD-300-85

Tag:

IRMA Roof Drain

SPECIFICATION: Watts Drainage RD-300-85 epoxy coated cast iron roof drain with flashing clamp, 4"(102) stainless steel perforated extension, self-locking polyethylene dome (standard), and no hub (standard) outlet.

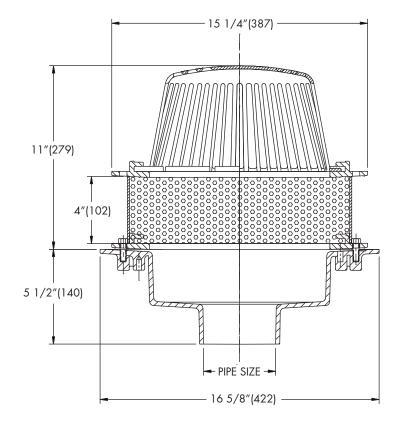

Suffix	Pipe Sizing (Select One) Description	
2	2"(51) Pipe Size (NH Only)	
3	3"(76) Pipe Size	
4	4"(102) Pipe Size	
5	5"(127) Pipe Size (NH Only)	
6	6"(152) Pipe Size	
8	8"(203) Pipe Size	
10	10"(254) Pipe Size (NH Only)	

	Outlet Type (Select One)	
Suffix	Description	
NH P X	No Hub (M) Push On Inside Caulk	

Options (Select One or More)		
Suffix	Description	
-13	Galvanized Body and Clamp	
-B	Sump Receiver	
-D	Underdeck Clamp	
-F	Deck Flange/Adj. Extension	
-GSS	Stainless Steel Ballast Guard	
-K	Ductile Iron Dome	
-K13	Galvanized Dome	
-K40	Ductile Iron Low Dome (4" high)	
-K80	Aluminum Dome	
-K81	Rough Bronze Dome	
-K83	SS Mesh Covered Dome	
-L	Vandal Proof Dome	
-R	2" External Water Dam	
-US	Buy American Compliant	
-W	Adjustable Internal Water Dam	

	Free Area Sq. In.
I	137

Deck opening 14-1/2" (368) with sump receiver 18" (457)

Job Name	Contractor
Job Location	Contractor's P.O. No.
Engineer	Representative
	ricpresentative

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

WATTS

A Watts Water Technologies Company

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com **Canada:** Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca **Latin America:** Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com