




HY2

Tag: _____

Concealed Non-Freeze Wall Hydrant

PROLINE

SPECIFICATION: Watts ProLine HY2 concealed non-freeze wall hydrant with integral vacuum breaker, 3/4" (20mm) hose connection, and nickel bronze or stainless steel locking box.

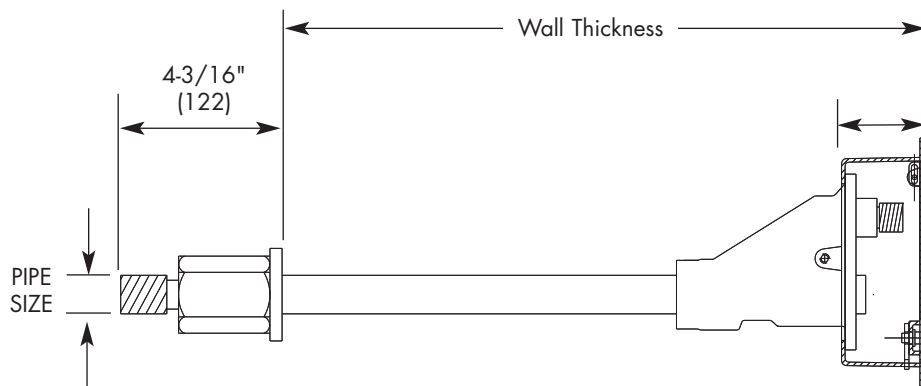

Model Suffix	Pipe Size	Wall Thickness	
-6	3/4" FIP or 1" MIP	6"	<input type="checkbox"/>
-8	3/4" FIP or 1" MIP	8"	<input type="checkbox"/>
-10	3/4" FIP or 1" MIP	10"	<input type="checkbox"/>
-12	3/4" FIP or 1" MIP	12"	<input type="checkbox"/>
-14	3/4" FIP or 1" MIP	14"	<input type="checkbox"/>
-16	3/4" FIP or 1" MIP	16"	<input type="checkbox"/>
-18	3/4" FIP or 1" MIP	18"	<input type="checkbox"/>
-20	3/4" FIP or 1" MIP	20"	<input type="checkbox"/>
-22	3/4" FIP or 1" MIP	22"	<input type="checkbox"/>
-24	3/4" FIP or 1" MIP	24"	<input type="checkbox"/>

Options (Select One or More)		
Suffix	Description	
-1	1" Hose Connection Adapter	<input type="checkbox"/>
-BP	Black Plate	<input type="checkbox"/>
-KL	Cylinder Key Lock	<input type="checkbox"/>
-SS	Stainless Steel Box	<input type="checkbox"/>

Job Name _____ Contractor _____
Job Location _____ Contractor's P.O. No. _____
Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



USA: 100 Watts Road, Spindale, NC, 28160 TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 Website: www.wattsdrainage.com