

R-14 wall-mounted systems

Three models for flow rates to 5400 GPD, available with brass and stainless steel fittings. Fully assembled and ready for installation.



R14-03-BWM System

Standard features

- Stainless steel frame
- Stainless steel pressure vessels
- Pre-filter housing and cartridge, 10" Full-Flow
- Webtrol® multi-stage centrifugal pump
- Automatic inlet valve
- Low-pressure shut-off with automatic restart
- Tank level input
- Pretreatment interlock input
- Adjustable recycle line
- Pre-filter pressure gauges
- Pump discharge pressure gauge (liquid filled)
- Flow meter for product water
- Flow meter for reject water
- Check valve for product water
- Sample valve for product water
- On / off switch

Specifications

Feed water connection	1" FNPT
Product water connection (1800 & 3600 GPD)	1/2" tube
Product water connection (5400 GPD)	5/8" tube
Reject water connection (all R14 models)	1/2" tube
Feed water pressure requirement (minimum)	10 PSIG
Drain requirement (maximum)	10 GPM
Electrical requirement	230v/60hz
Amps (1800 & 3600 GPD)	6
Amps (5400 GPD)	9

Options

Part Number	Description
R2353-SD	Product water float switch
R2288	Whole house option*

*Includes 300 gallon tank, product water float switch and repressurization pump with built-in controls.

Models

Model Number	Fittings & Valves	GPD	Pump (H.P.)	Recovery (Adjustable)	Membrane Size	Membranes	Feed Water Required* (GPM)	Typical Rejection	Dimensions	Ship Wt. (Lbs.)
R14-01-1WM	SS	1800	1	15%-75%	4" x 40"	1	2.5	98%	41"x51"x18"	200
R14-01-BWM	Brass	1800	1	15%-75%	4" x 40"	1	2.5	98%	41"x51"x18"	200
R14-02-1WM	SS	3600	1	25%-75%	4" x 40"	2	5	98%	41"x51"x18"	250
R14-02-BWM	Brass	3600	1	25%-75%	4" x 40"	2	5	98%	41"x51"x18"	250
R14-03-1WM	SS	5400	1.5	35%-75%	4" x 40"	3	7.5	98%	41"x51"x18"	300
R14-03-BWM	Brass	5400	1.5	35%-75%	4" x 40"	3	7.5	98%	41"x51"x18"	300

*At 50% recovery.

Notes: Performance specifications are based on 77°F feed water, 3 SDI or less, TDS below 1000 and pH of 8. Please see water temperature conversion charts to determine actual production rate for each installation. Chlorine reduction and other pretreatment may be required. Membrane rejection rates are based on membrane manufacturer's specifications. Pre-filter is Flow-Pro® FPMB-BB5-10 melt blown cartridge. Systems are designed for use with municipal and well water.

Introduction

Watts Reverse Osmosis (R/O) Systems are designed to provide the commercial and industrial user with the most trouble free, cost effective and reliable form of water treatment available, by providing every option necessary for a successful installation.

Principles of Reverse Osmosis

Watts R/O systems employ thin film composite spiral wound membrane elements for superior performance. To simply describe the process, pump pressure is used to supply source water to reverse osmosis membranes. These special membranes allow only high quality water to permeate them. In turn, they reject metals, salts, ionic and organic impurities that are processed to waste. Suspended solids are removed by pre-filters, which are standard components on all Watts RO systems.

Water temperature

Product water quality and production of any RO system is dependent on pressure and temperature. Watts™ RO systems are rated at standard conditions of 77°F (25°C), 60 psi (4.2 bar) inlet pressure and 1,000 TDS feed water quality. Higher temperatures will result in more water passing through the membranes and increased water production. As a rule, at given pressures and TDS levels, for each one-degree change in water temperature the change in water production is approximately 2%.

Water temperature		Production Factor* (Using thin film membranes)
°F	°C	
40	4	0.48
50	10	0.60
60	16	0.73
70	21	0.88
77	25	1.00
80	27	1.06
90	32	1.26

*Percent of rated production.

Water pressure

Watts® commercial RO systems require a minimum of 10 psi feed pressure to function properly. The maximum pressure is 90 psi, and a pressure regulator must be utilized over 90 psi to reduce feed water pressure.

Feed / source water inlet requirements

The source water requirements shown below are essential for proper operation:

Inlet feed water requirements	
Factor	Requirement
Hardness	<1 grain per gallon
Free chlorine	0 ppm
T.D.S.	<1,000 ppm
S.D.I.	<5
pH	3-11
Iron	<0.01 ppm
Silica	<25 ppm
Manganese	<0.05 ppm
Turbidity	<1 NTU
Temperature	40°F - 95°F (4°C - 32°C)
Pressure	10 - 90 psi (2.8 - 5.6 bar)


Note: Pretreatment may be required if the above parameters are not met.

Failure to meet feed water requirements may foul membranes, void the warranty and possibly make it necessary to down-rate performance.

All specifications listed are based on an average of 1,000 TDS feed water, 77°F (25°C) temperature and 60 psi (4.2 bar) pressure. Typically, higher-pressure differentials and higher temperatures increase water production and water quality. Maximum pressure and temperature limits must be observed.

Distributed by:

General RO Process Diagram

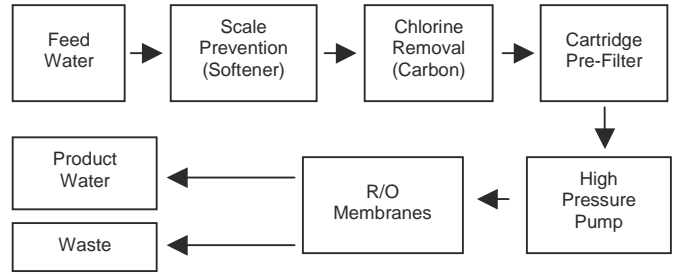

1. System location

The RO system should be located on a level surface in an area sheltered from sun, wind and rain. The temperature in this area should be maintained, and should not fall below 35°F, nor greater than 95°F. If these limits are exceeded, damage to components may result and the warranty may be considered void. It is important to allow sufficient space around the unit so maintenance can easily be performed.

2. Plumbing

The high-pressure pumps used require a continuous flow of water to the system. Minimum feed pressure is 10 psi. Please see table, below for minimum flow rates.

3. Feed water

Piping for feed water to the RO system should be either copper or plastic. Iron and carbon steel pipe will increase the iron content of the raw feed water and adversely affect the RO system's performance. Temperature of the feed water must not exceed 95°F.

4. Product water (permeate) line connection

Connect the product water (permeate) line to the manifold on the back side of the system. This line should not have valves and should run as directly as possible to the storage tank.

5. Concentrate (waste) line connection

Connect the waste line (concentrate) to the manifold on the back side of the system. The waste from the system should not have valves and should have an air break between it and the building drain system. The tubing or piping used for discharge of the concentrate should be run to an open drain in a free and unrestricted manner.

6. Electrical

The customer must provide a properly sized electrical service.

Level controls

In most installations it is necessary to use the level switch connector wire to install a level control or an electrical switch to turn the RO system on and off based on the water level in the storage tank.

Pumps

Never let pumps run dry. Operating pumps without sufficient feed water will cause damage. Feed pumps with filtered water only.

Pre-filtration

All Watts® RO systems come with particulate pre-filters to remove suspended particles down to five (5) micron in size. Change pre-filter cartridges at least every month or when there pressure differential of 10% or more that start-up pressure differential with clean cartridges.

Limited warranty

Watts® Commercial Reverse Osmosis systems are warranted to the original purchaser to be free of defects in material and workmanship for a period of one year from date of shipment. Should defects occur, Watts will repair or replace parts, which are defective. Shipping and labor costs are excluded for this limited warranty, and these costs are the customer's responsibility. Normal wear, accident, abuse, misuse, unauthorized alteration or repairs are also excluded. Watts will not be responsible for any incidental or consequential damages, losses or expenses arising from the installation or use of a Watts system. For warranty issues please call your dealer or Watts Water Quality & Conditioning Products at 800-659-8400.