


Classic Series

F513-6 (Globe)
F1513-6 (Angle)

- Installed on branch of tee off main pumping header
- Normally open construction
- Discharges to atmosphere on pump start-up
- Closes slowly diverting pressure into system during pumping cycle
- Opens slowly on pump shut-off
- Limit Switch turns pump off when valve is fully open
- Adjustable Opening and Closing Speed
- Solenoid equipped with Manual Operator

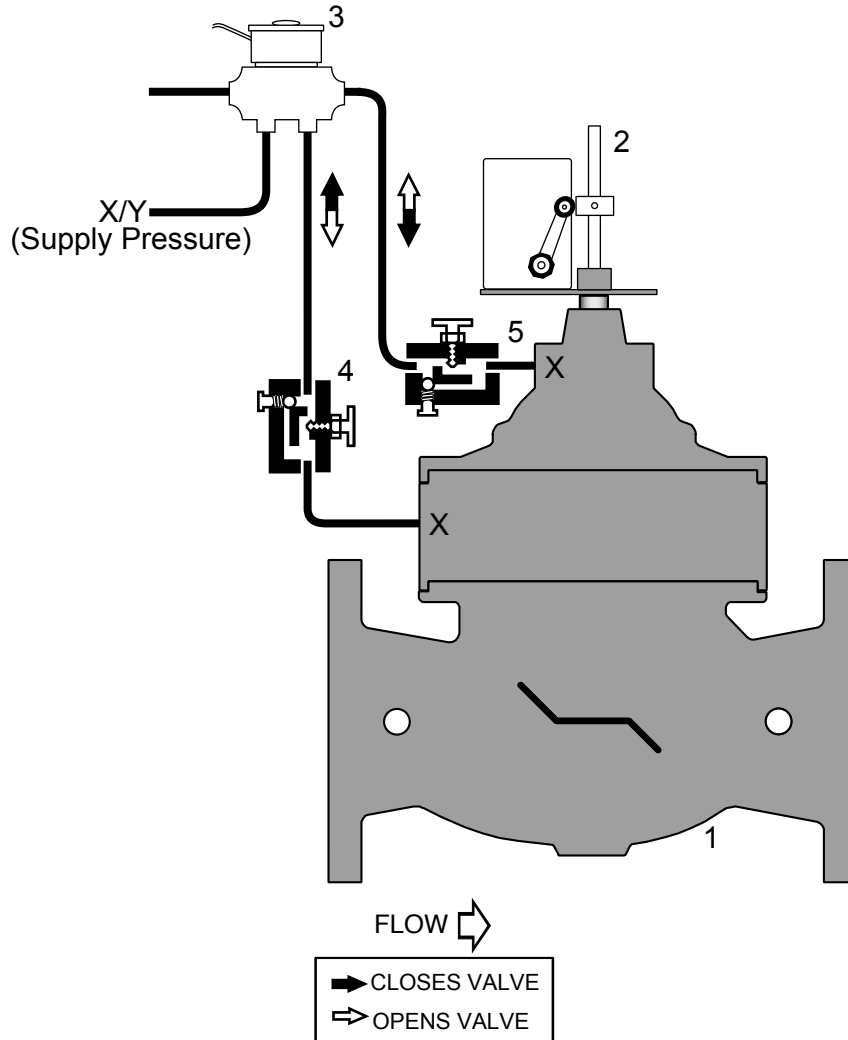

STANDARD COMPONENTS

- 1 - Main Valve (Dual Chamber)
- 2 - Limit Switch
- 3 - 4-Way Solenoid
- 4 - Adjustable Closing Speed
- 5 - Adjustable Opening Speed

OPTIONS and ACCESSORIES

- X - Isolation Cocks (STANDARD)
- L - Dual Limit Switch