


## Mustang Series

M113-32 or M6113-32 (Globe)  
M1113-32 or M61113-32 (Angle)

- Electrically operated on / off (open / closed) valve
- Normally Open or Closed operation
- High capacity pilot system for quick response
- Adjustable Opening and Closing Speed
- Hydraulic Check Feature prevents flow reversal
- Solenoid equipped with Manual Operator

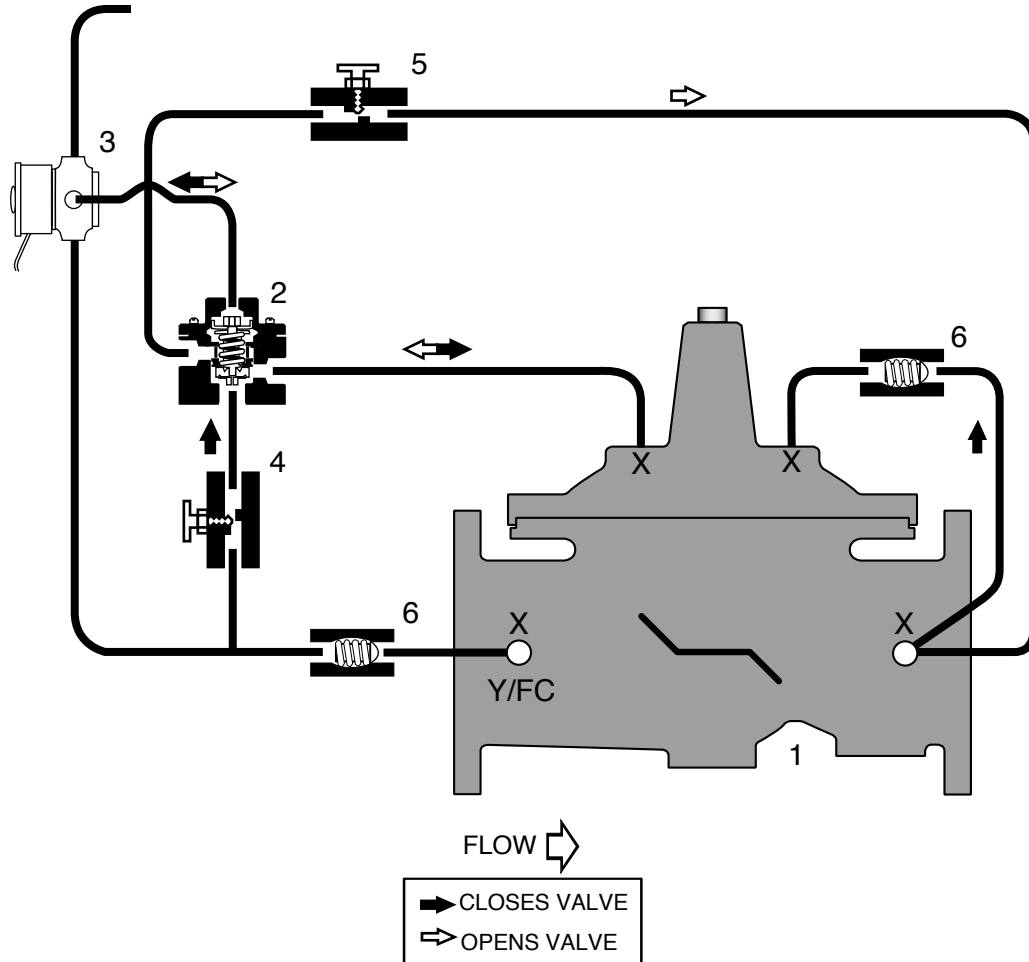

### STANDARD COMPONENTS

- 1 - Main Valve (Single Chamber)
- 2 - Fig. 22-1 Accelerator Control
- 3 - 3-Way Solenoid
- 4 - Adjustable Closing Speed
- 5 - Adjustable Opening Speed
- 6 - Check Valve

### OPTIONS and ACCESSORIES

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo Clean)
- P - Position Indicator
- L - Limit Switch