ONE-WAY FLOW ALTITUDE VALVE with SOLENOID OVERRIDE FEATURE

01/05

Mustang Series

M127-32 or M6127-32 (Globe)
M1127-32 or M61127-32 (Angle)

- Designed for Tank Fill applications
- Opens when Tank head pressure is below setpoint
- Closes when Tank head pressure is above setpoint
- Solenoid (On-Off) Feature provides electrical override of Tank Fill function
- Tank Sense Line is field installed (to Tank or standpipe)
- Adjustable Opening and Closing Speed
- Altitude setpoint is adjustable

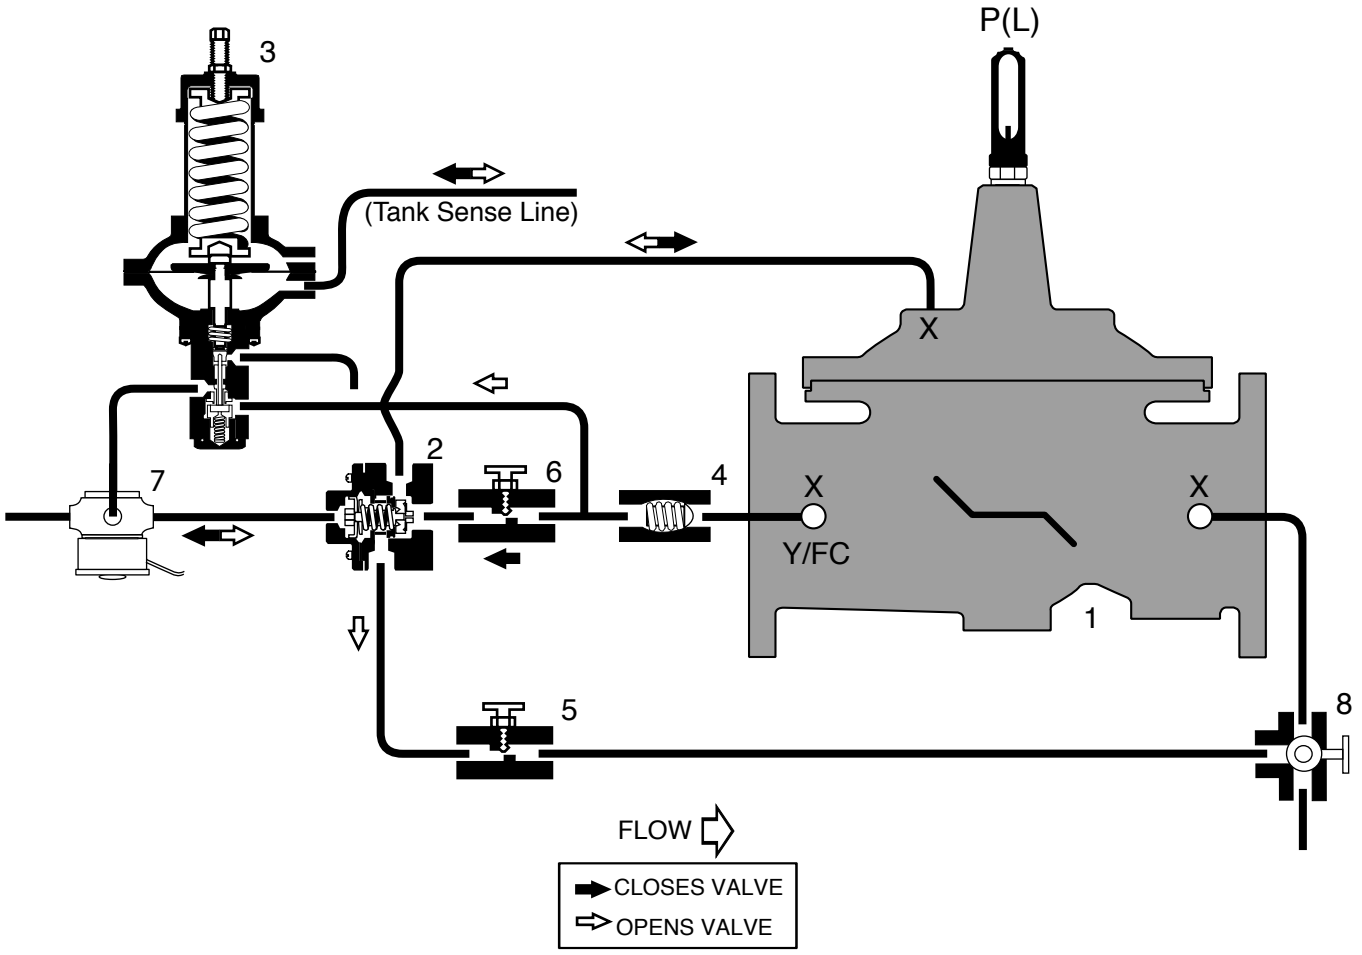

STANDARD COMPONENTS

1 - Main Valve (Single Chamber)
2 - Fig. 22-1 Accelerator Control
3 - Altitude Control
4 - Check Valve
5 - Adjustable Opening Speed
6 - Adjustable Closing Speed
7 - 3-Way Solenoid
8 - 3-Way Ball Valve
P - Position Indicator

OPTIONS and ACCESSORIES

- ○ X - Isolation Cocks
- ○ FC - Flo-Clean Strainer
- ○ Y - Y-Strainer (Replaces Flo-Clean)
- ○ L - Limit Switch