


## Stainless Series

S110-18 or S6110-18 (Globe)  
S1110-18 or S61110-18 (Angle)

- Opens when float reaches low level stop
- Closes when float reaches high level stop
- Throttles to maintain minimum upstream pressure during fill cycle

- Adjustable Opening and Closing Speed
- Low and High Level stop collars are adjustable

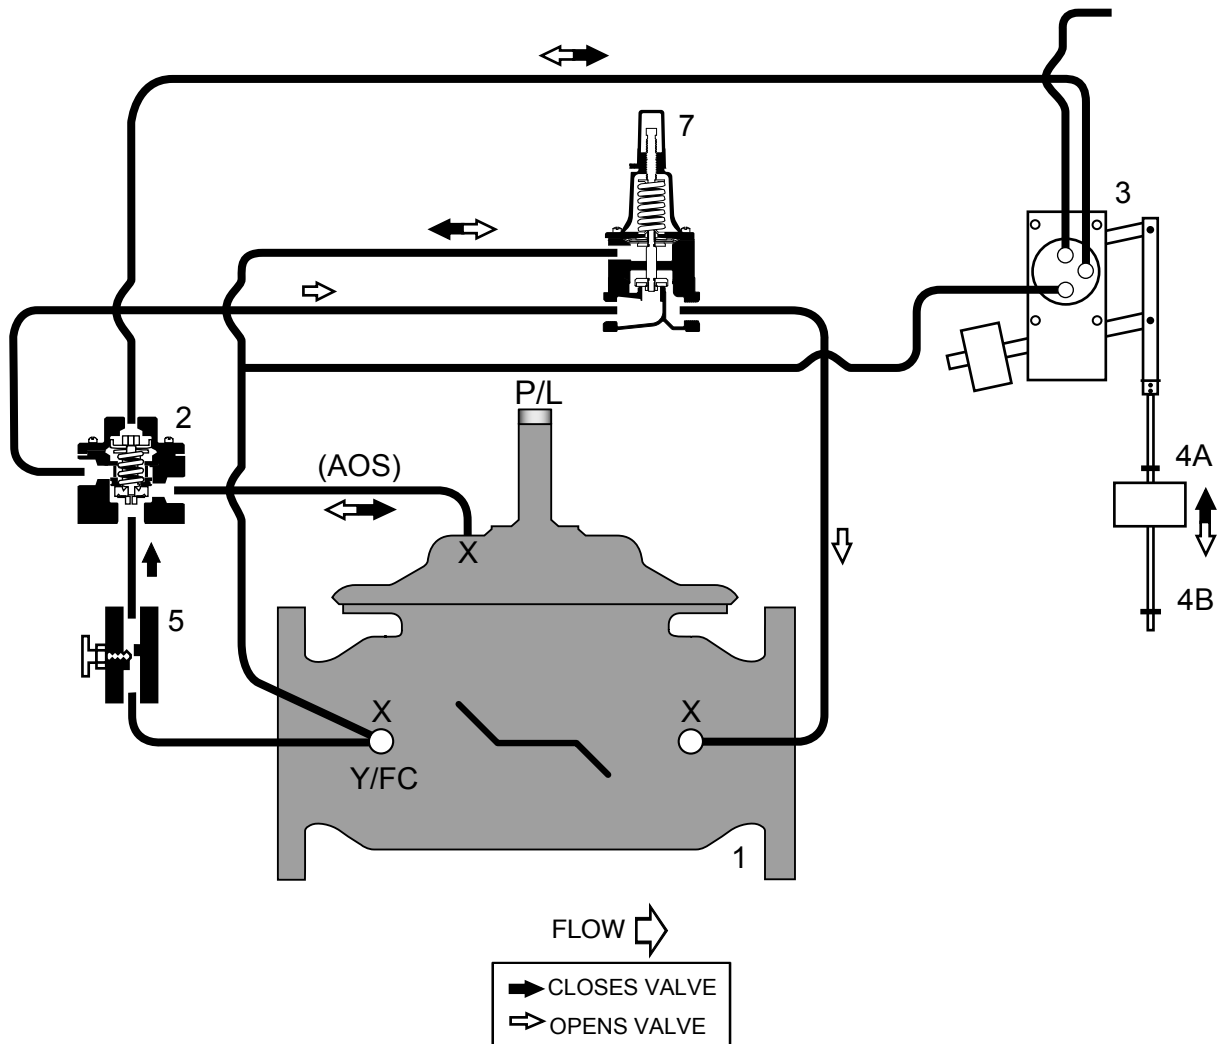

### STANDARD COMPONENTS

- 1 - Basic Valve (Single Chamber)
- 2 - Fig. 22 Accelerator Control
- 3 - On-Off Float Control
- 4A - High Level Adjustment Stop
- 4B - Low Level Adjustment Stop
- 5 - Adjustable Closing Speed
- 6 - Pressure Sustaining Control

### OPTIONS and ACCESSORIES

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo Clean)
- P - Position Indicator
- L - Limit Switch