


Stainless Series

S113-6 or S6113-6 (Globe)
S1113-6 or S61113-6 (Angle)

- Electrically operated on / off (open / closed) valve
- Normally Open or Closed operation

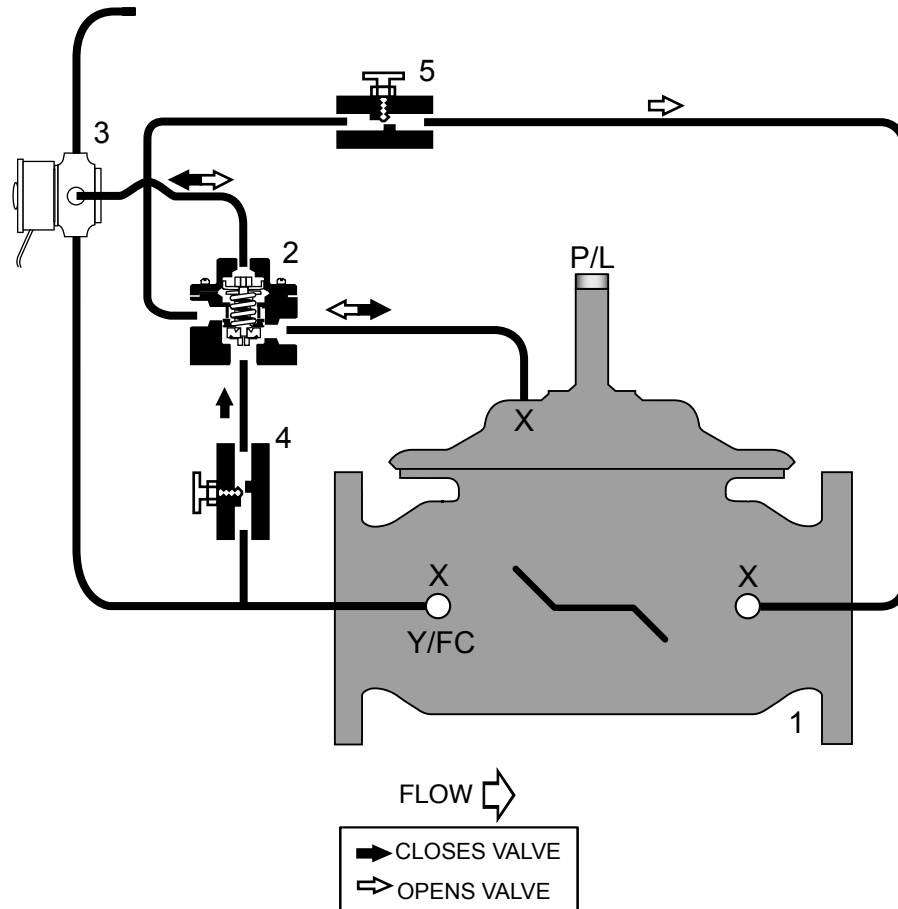

STANDARD COMPONENTS

- 1 - Main Valve (Single Chamber)
- 2 - Fig. 22-1 Accelerator Control
- 3 - 3-Way Solenoid
- 4 - Adjustable Closing Speed
- 5 - Adjustable Opening Speed

OPTIONS and ACCESSORIES

- X - Isolation Cocks (STANDARD)
- FC - Flo-Clean Strainer (OPTIONAL)
- Y - Y-Strainer (Replaces Flo-Clean) (STANDARD)
- P - Position Indicator
- L - Limit Switch