


Stainless Series

S114-2 or S6114-2 (Globe)
S1114-2 or S61114-2 (Angle)

- Throttles to maintain constant rate-of-flow
- Throttles to reduce high upstream pressure to constant lower downstream pressure
- Adjustable Closing Speed
- Orifice Plate Assembly is remote mounted (field installed)
- Rate-of-Flow and Reducing setpoints are separately adjustable

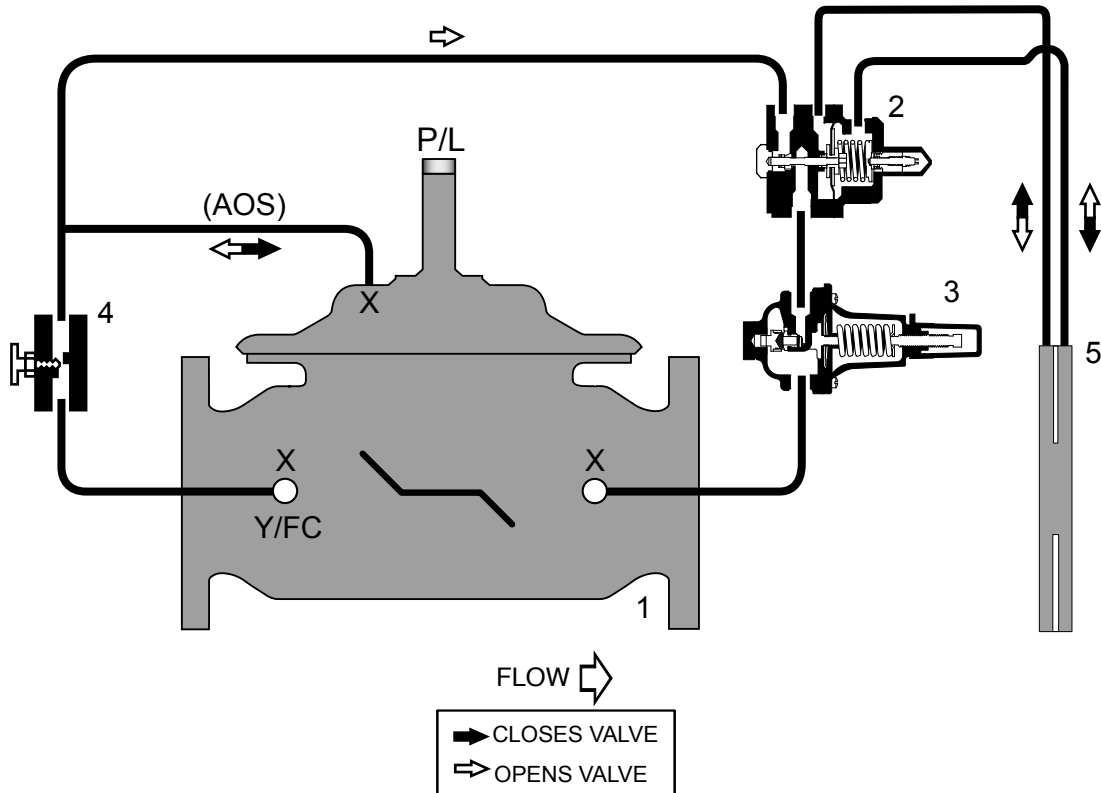

STANDARD COMPONENTS

- 1 - Main Valve (Single Chamber)
- 2 - Rate-of-Flow Control
- 3 - Pressure Reducing Control
- 4 - Adjustable Closing Speed
- 5 - Orifice Plate Assembly

OPTIONS and ACCESSORIES

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo-Clean)
- AOS – Adjustable Opening Speed
- P - Position Indicator
- L - Limit Switch