


## Stainless Series

S114-3 or S6114-3 (Globe)  
S1114-3 or S61114-3 (Angle)

- Throttles to maintain constant rate-of-flow
- Hydraulic Check Feature prevents flow reversal
- Adjustable Closing Speed
- Orifice Plate Assembly is remote mounted (field installed)
- Rate-of-Flow setpoint is adjustable

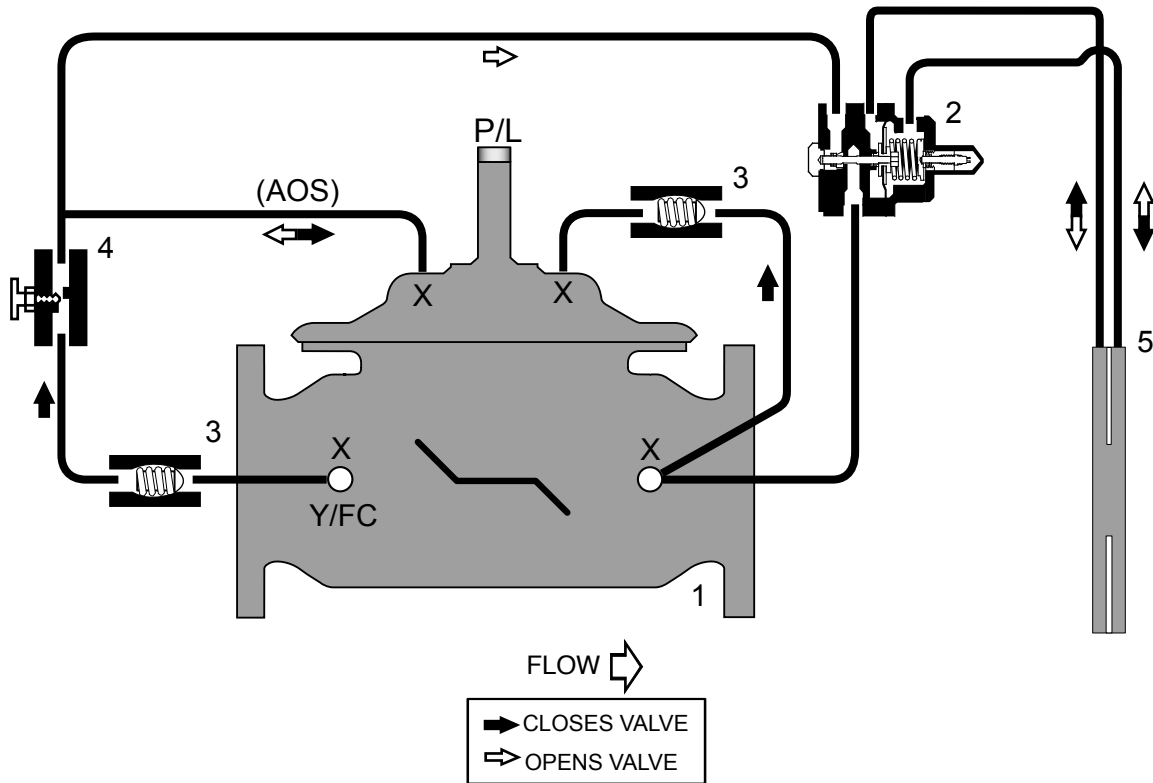

### STANDARD COMPONENTS

- 1 - Main Valve (Single Chamber)
- 2 - Rate-of-Flow Control
- 3 - Check Valve
- 4 - Adjustable Closing Speed
- 5 - Orifice Plate Assembly

### OPTIONS and ACCESSORIES

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo-Clean)
- AOS – Adjustable Opening Speed
- P - Position Indicator
- L - Limit Switch