


**Stainless Series**

**S115-11 or S6115-11 (Globe)  
S1115-11 or S6115-11 (Angle)**

- Throttles to reduce high upstream pressure to constant lower downstream pressure
- Throttles to maintain minimum upstream pressure
- Hydraulic Check Feature prevents flow reversal
- Reducing and Sustaining setpoints are separately adjustable

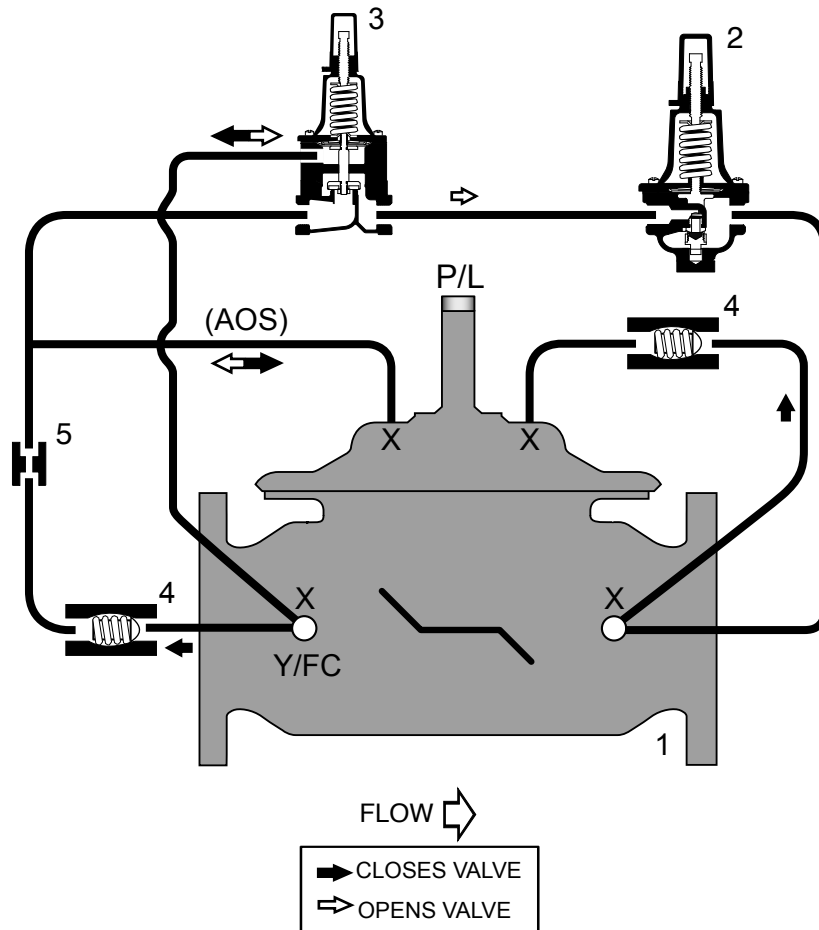

**STANDARD COMPONENTS**

- 1 - Main Valve (Single Chamber)
- 2 - Pressure Reducing Control
- 3 - Pressure Sustaining Control
- 4 - Check Valve
- 5 - Fixed Orifice

**OPTIONS and ACCESSORIES**

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo-Clean)
- ACS - Adjustable Closing Speed (Replaces Fixed Orifice)
- AOS - Adjustable Opening Speed
- P - Position Indicator
- L - Limit Switch