


Stainless Series

S115-58 or S6115-58 (Globe)
S1115-58 or S61115-58 (Angle)

- Throttles to reduce high upstream pressure to constant lower downstream pressure
- Return Flow Feature opens valve when downstream pressure is higher than upstream
- Reducing setpoint is adjustable

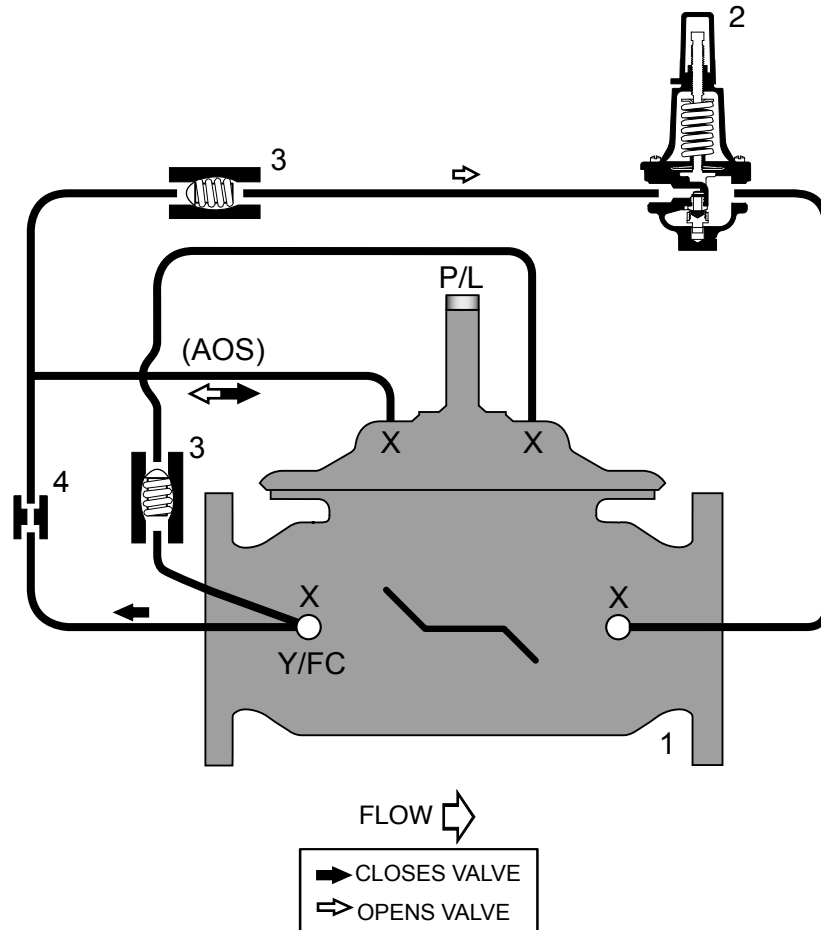

STANDARD COMPONENTS

- 1 - Main Valve (Single Chamber)
- 2 - Pressure Reducing Control
- 3 - Check Valve
- 4 - Fixed Orifice

OPTIONS and ACCESSORIES

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo-Clean)
- ACS - Adjustable Closing Speed (Replaces Fixed Orifice)
- AOS - Adjustable Opening Speed
- P - Position Indicator
- L - Limit Switch