


Stainless Series

S116-32 or S6116-32 (Globe)
S1116-32 or S61116-32 (Angle)

- Throttles open when upstream pressure is above setpoint
- Throttles closed when upstream pressure is below setpoint
- Solenoid (On-Off) Feature provides electrical override of valve function
- Hydraulic Check Feature prevents flow reversal
- Commonly installed between two pressure zones or in Tank-Fill applications
- Adjustable Closing Speed
- Setpoint is adjustable

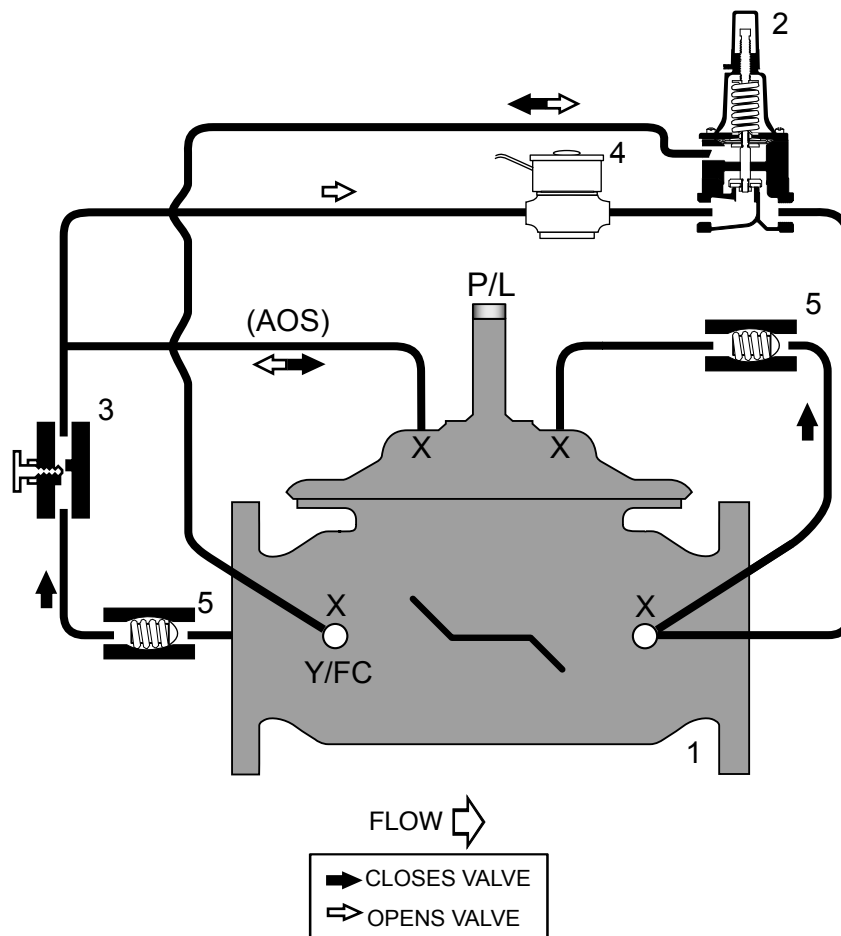

STANDARD COMPONENTS

- 1 - Main Valve (Single Chamber)
- 2 - Pressure Sustaining Control
- 3 - Adjustable Closing Speed
- 4 - 2-Way Solenoid
- 5 - Check Valve

OPTIONS and ACCESSORIES

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo-Clean)
- AOS – Adjustable Opening Speed
- P - Position Indicator
- L - Limit Switch