NON-SURGE CHECK VALVE
(4” and Smaller)

01/05

Stainless Series

S118-3 or S6118-3 (Globe)
S1118-3 or S61118-3 (Angle)

- Valve closes when downstream pressure is greater than upstream pressure
- Valve opens when upstream pressure is greater than downstream pressure
- Opening and Closing Speed are separately adjustable

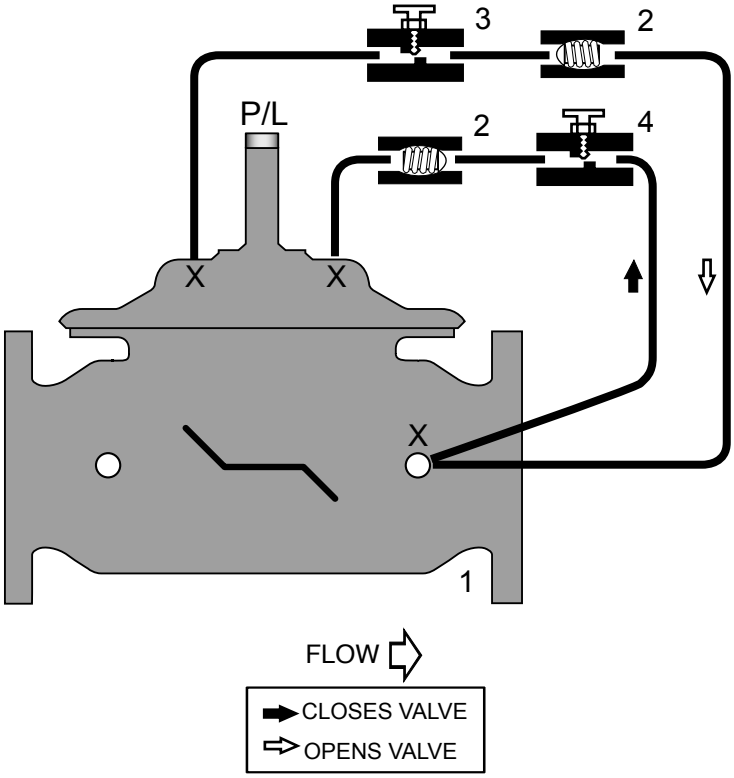

STANDARD COMPONENTS

1 - Main Valve (Single Chamber)
2 - Check Valve
3 - Adjustable Opening Speed
4 - Adjustable Closing Speed

OPTIONS and ACCESSORIES

- ○ X - Isolation Cocks
- ○ P - Position Indicator
- ○ L - Limit Switch

8550 Hansen Road • Houston, Texas 77075 • (Ph) 713.943.0688 • (Fx) 713.944.9445 • www.wattsacv.com