PUMP CONTROL VALVE with MECHANICAL CHECK FEATURE

01/05

Stainless Series

S513-5 or S6513-5 (Globe)
S1513-5 or S61513-5 (Angle)

- Opens at adjustable rate on pump start-up
- Closes at adjustable rate on pump shut-off
- Limit Switch turns pump off when valve closes
- Built-in Mechanical Lift-Check Feature prevents flow reversal
- Solenoid equipped with Manual Operator

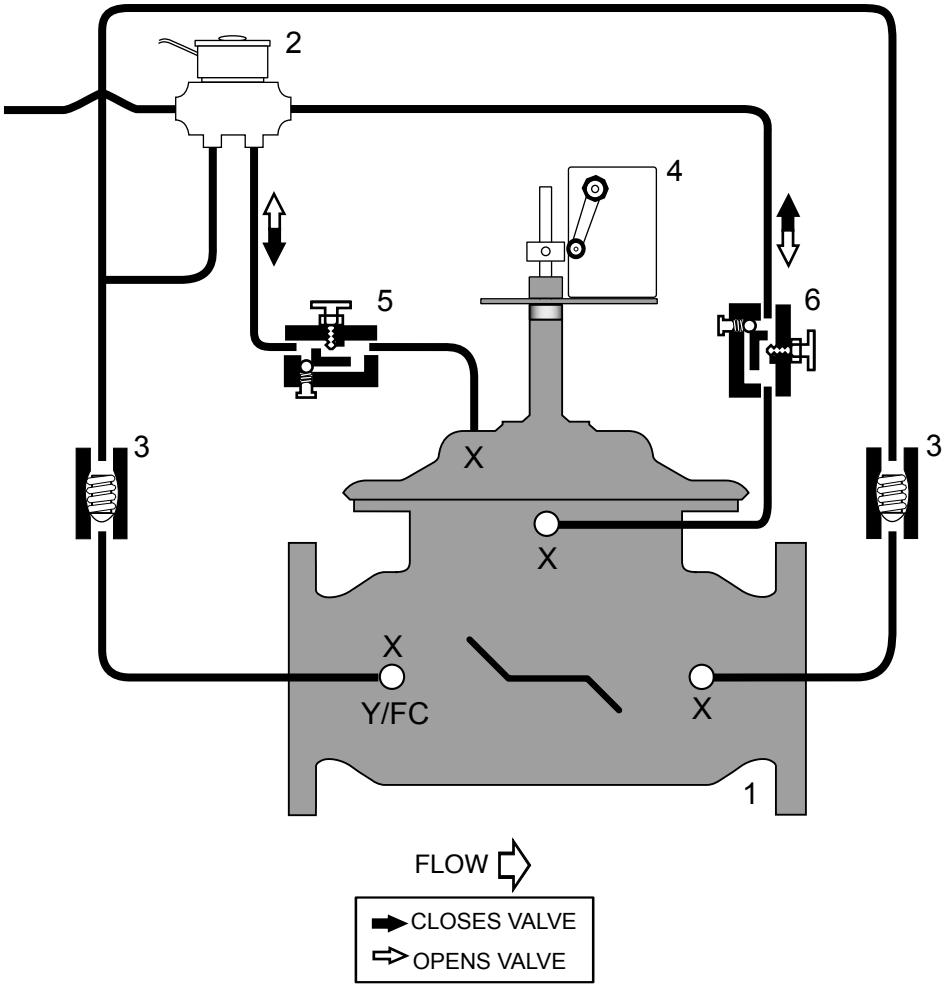

STANDARD COMPONENTS

1 - Main Valve (Dual Chamber w/Lift-Check)
2 - 4-Way Solenoid
3 - Check Valve
4 - Limit Switch
5 - Adjustable Opening Speed
6 - Adjustable Closing Speed

OPTIONS and ACCESSORIES

- ○ X - Isolation Cocks (STANDARD)
- ○ FC - Flo-Clean Strainer (OPTIONAL)
- ○ Y - Y-Strainer (STANDARD)
- ○ L - Dual Limit Switch

8550 Hansen Road • Houston, Texas 77075 • (Ph) 713.943.0688 • (Fx) 713.944.9445 • www.wattsacv.com