

WATTS®


WATER QUALITY & CONDITIONING PRODUCTS



Watts®

Family of water quality improvement products and equipment for whole house water treatment.

Whole house water quality problems.

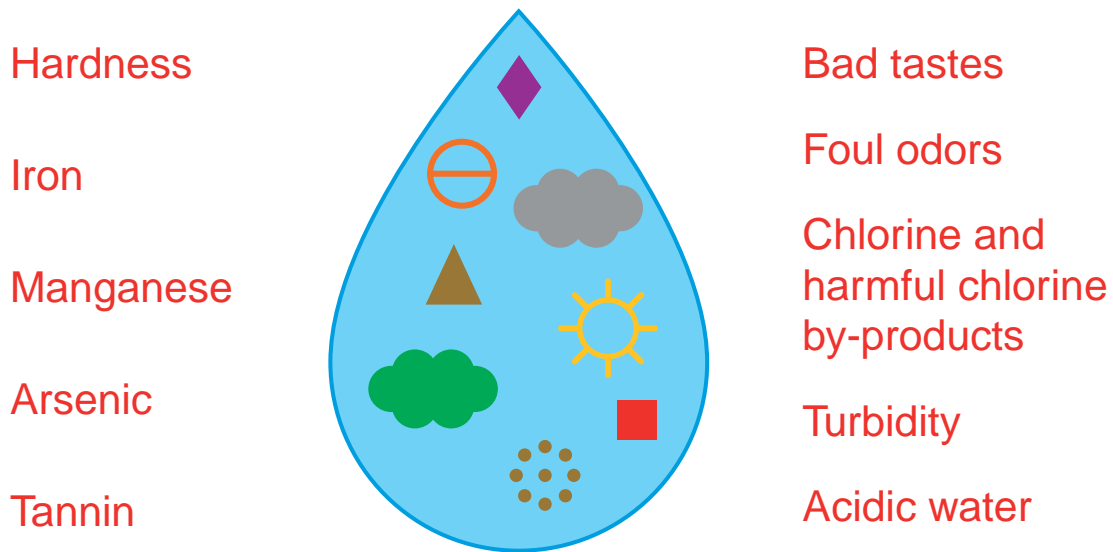

The continuous water cycle . . .

Nature intended us to have high quality water. This is why we have the *continuous water cycle*, whereby water from our oceans, rivers, lakes and streams falls to the ground as rain or snow and becomes filtered as it seeps through the earth's surface. As the water works its way through the ground, however, it picks up minerals by dissolving limestone, causing water hardness. Water may also come into contact with iron, manganese, Arsenic and other contaminants, which cause additional water treatment problems.

The chart below lists typical whole house water quality problems and indicates which equipment effectively corrects any problems you may have in your home.

Water Quality Problems	Symptoms	Recommended Equipment
Hardness	Mineral deposits on dishes and glassware; stiff, dingy laundry; high soap usage and need for fabric softeners; dry, itchy skin and scalp; unmanageable hair; extra work to remove soap curd on bathtubs and shower stalls; high energy costs due to scale build-up in pipes and on appliances.	Water Softener.
Chlorine, foul odors and tastes	Chlorine taste; foul odors; damage to hair; itchy skin.	Backwashing filter using activated carbon.
Iron & Manganese	Unpleasant metallic tastes; rust particles; staining on plumbing fixtures; red water; odors.	Iron filter.
Turbidity	Cloudy water; sediment, sand, silt and rust particles.	Media filter.
Acidic water (low pH)	Green stains on bathroom sinks and other porcelain surfaces; blue green water. (Acidic water may cause corrosion of pipes & plumbing fixtures.)	Acid neutralizer using Calcite.
Tannin	Brownish, tea colored water; musty odors.	Tannin filter.
Arsenic	A naturally occurring element found in ground water, Arsenic is a carcinogen at high concentrations, and the EPA reports Arsenic may cause adverse health effects in low concentrations. Testing for Arsenic is highly recommended.	Arsenic Reduction System.



Watts® whole house filters for chlorine, taste, odor and sediment reduction

Watts activated carbon filters are highly popular because they correct a wide range of water quality problems, by removing chlorine, tastes, odors and sediment.

Benefits

- Great tasting water from every tap in your house!
- No bad tastes!
- No foul odors!
- Crystal clear water for drinking, bathing and cooking!
- User-friendly equipment.
- Low maintenance due to automatic operation.

Models

Part Number	Valve	Mineral Tank Size	Media Cubic Ft.	Gravel (Lbs)	Service Flow (GPM)	Drop (PSI)	Back Wash (GPM)	Floor Space LxWxH
NC09-W100F	Timeclock	9X48	1.0	10	4	< 15	4.2	16X10X55
NC10-W100F	Timeclock	10X54	1.5	10	6	< 15	5.3	16X11X62
NC12-W100F	Timeclock	12X52	2.0	20	8	< 15	7.5	17X13X60
NC14-W100F	Timeclock	14X65	3.0	40	11	< 15	10	18X15X74
NC16-W100F	Timeclock	16X65	4.0	50	14	< 15	11	20X17X74
NC21-W100F	Timeclock	21X62	5.0	100	2	< 15	25	22X23X70

Whole house filters for sediment reduction with high efficiency Micro-Z™ filter media.

Watts filtration systems for sediment use our high performance Micro-Z filter media to provide increased loading capability and higher service flow rates. Micro-Z's unique Zeolite structure offers increased porosity to outperform conventional sand filters by reducing water consumption. The need to backwash is dramatically reduced!

Features & benefits

- Uses Micro-Z™ for increased solids loading.
- Unique structure allows for higher flow rates.
- Reduces water consumption because the need to backwash is dramatically reduced.
- Reliable equipment, designed for long-term service.



Models

Part Number	Valve	Mineral Tank Size	Media Cubic Ft.	Gravel (Lbs)	Service Flow (GPM)	Drop (PSI)	Back Wash (GPM)	Floor Space LxWxH
NM09-W100F	Timeclock	9X48	1.0	10	5/9	< 15/25	5.3	16X10X55
NM10-W100F	Timeclock	10X54	1.5	10	7/10	< 15/25	7.5	16X11X62
NM12-W100F	Timeclock	12X52	2.0	20	9/15	< 15/25	11	17X13X60
NM14-W100F	Timeclock	14X65	3.0	40	13/21	< 15/25	15	18X15X74
NM16-W100F	Timeclock	16X65	4.0	50	17/28	< 15/25	25	20X17X74

Watts® whole house filters for iron and manganese reduction

Iron is one of the most common elements found in nature, and most ground waters contain a measurable amount of iron. Iron stains bathtubs, toilets, sinks, driveways and it will even stain the side of your house in sufficient concentrations. Watts offers two media types to remove iron in point-of-entry applications.

Two media types

FILOX™

A non-chemical oxidizing media to reduce Iron.

Greensand-Plus™

An enhanced version of the traditional medium to remove iron from water.

Filox™ system advantages

- Highest flow rate of any iron removal media.
- No oxidizing chemicals needed for regeneration.
- High efficiency with 80% manganese dioxide for enhanced performance and capacity.
- Effective, from 5.0 to 9.0 pH.
- System is easy to program, with 10 pre-programmed regeneration cycles to optimize water treatment.

Greensand-Plus™ system advantage

- Lower backwash requirements.
- Known saturation capacity.
- Higher temperatures and differential pressures than traditional Manganese Greensand.
- Greensand-Plus is also used for radium reduction.
- User friendly, low maintenance electronic time clock valve.



Note:

The use of chemicals and oxidizers, such as chlorine, potassium permanganate and oxygen may be required for both systems to provide the optimal treatment for Iron, Hydrogen Sulfide and Manganese.

Filox™ models

Part Number	Valve	Mineral Tank Size	Media Cubic Ft.	Gravel (Lbs)	Service Flow (GPM)	Drop (PSI)	Back Wash (GPM)	Floor Space LxWxH
NF09-W100F	Timeclock	9X48	1.0	10	6	< 15	5.3	16X10X55
NF10-W100F	Timeclock	10X54	1.5	10	9	< 15	7.5	16X11X62
NF12-W100F	Timeclock	12X52	2.0	20	12	< 15	10	17X13X60
NF14-W100F	Timeclock	14X65	3.0	40	18	< 15	15	18X15X74
NF16-W100F	Timeclock	16X65	4.0	50	24	< 15	20	20X17X74
NF21-W100F	Timeclock	21X62	5.0	100	27	< 15	25	22X23X70


Greensand Plus™ models

Part Number	Valve	Mineral Tank Size	Media Cubic Ft.	Gravel (Lbs)	Service Flow (GPM)	Drop (PSI)	Back Wash (GPM)	Floor Space LxWxH
NGP09-W100F	Timeclock	9X48	1.0	10	3	< 15	5.3	16X21X55
NGP10-W100F	Timeclock	10X54	1.5	10	4	< 15	7.5	16X22X62
NGP12-W100F	Timeclock	12X52	2.0	20	5	< 15	10	17X24X60
NGP14-W100F	Timeclock	14X65	3.0	40	6	< 15	12	18X15X74
NGP16-W100F	Timeclock	16X65	4.0	50	7	< 15	20	20X17X74
NGP21-W100F	Timeclock	21X62	5.0	100	12	< 15	25	22X23X70



Watts™ whole house filters for Arsenic reduction using highly effective MEDIA G2R® for exceptional performance.

Arsenic is a naturally occurring element found in ground water in many parts of the world. The World Health Organization and the U.S. EPA recognize Arsenic as a carcinogen and have determined it may cause long-term adverse health effects in concentrations above 10 ppb.

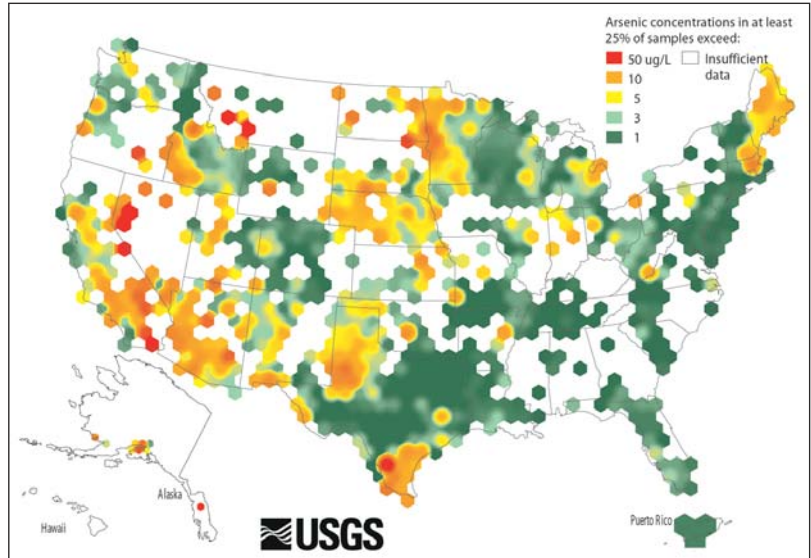

Arsenic concentration map for the United States

Media G2R®

Media G2R® uses a patented process, whereby two components are combined to produce a unique water treatment media, which outperforms conventional Arsenic reduction materials. Media G2R® advantages are as follows:

- Adsorbs both Arsenic III and IV.
- NSF standard 61 certified.
- Performs over a wide range of pH, up to 8.
- Long life expectancy to reduce costs.
- Proven results!



Electronic control

A control valve with special electronics is used to determine when capacity has been reached. This provides assurance only safe water is being provided by the system.

Models

Model Number	Design Flow Rate (GPM)	Mineral Tank	Media Cu. Ft.
WARS10R	3.75	10" x 54"	1.5
WARS12R	5	12" x 52"	2
WARS14R	7.5	14" x 65"	3

Note: Systems come fully assembled with media installed.

Additional Watts® whole house water treatment systems

We offer the following systems for specialty applications:

Application	Problems	Model Number	Control Valve	Mineral Tank	Media Cubic Ft.	Dome hole
Acidic water	Low pH Green stains	NN10-W100F	Timeclock	10" x 54"	1.5	Yes
		NN12-W100F	Timeclock	12" x 54"	2	Yes
Tannin	Discoloration (brown) Odors	Applications vary from one geographic area to another, your authorized Watts dealer will consult the factory for recommendations.				

Drinking water systems

Your Watts authorized dealer can provide you with a full range of water quality improvement products for drinking water applications. This equipment includes reverse osmosis systems, ultraviolet light disinfectant systems, the Watts® microbiological filter, under counter filters, whole house cartridge filters, whole house ROs and pre and post filters.



Under counter model.

Reverse Osmosis Systems

Recognized as the best technology to remove the widest spectrum of drinking water contaminants. Under counter and whole house models are available.



Whole house model.



The Watts® Microbiological Filter

Performance validated by independent lab. Removes bacteria, cysts, virus, chlorine, taste and odors. Certified to NSF Standard 42.

Big-Bubba® cartridge filter

Non-electric, non-metallic whole house filter for sediment, chlorine, taste and odor.



Hydro-Safe® UV systems for disinfection

Popular in rural areas and when chlorine disinfection may not be adequate to reduce bacteria, e-coli and other harmful contaminants. Available in 110 and 230 volt models.

Pre & post filter housings

Ideal before and after whole house softeners and filters.



Available with wide range of cartridge options.



Watts Regulator was founded by Joseph Watts in 1874 as he "set the standard" for valve technology. Today, Watts Water Technologies is a New York Stock Exchange Company, with over eighty (80) facilities worldwide. We are dedicated to providing the best consumer value for every product we supply. The Watts Water Quality & Conditioning Products division has stocking locations in Florida, Texas and Arizona. We market our equipment through an international network of trained water quality improvement professionals who sell, install and service our fine line of equipment. We invite you to contact the Watts Water Quality & Conditioning Products dealer listed below for more information.

Limited Warranty

These products shall be free from defects in material and workmanship at the time of installation, where originally installed. The warranty period begins on the installation date, but shall not begin later than six (6) months from the date of manufacture. Components showing unmistakable signs of defects in materials or workmanship will be repaired or replaced without charge and returned, freight prepaid. Watts does not accept any liability, or warranty related issues for this equipment due to misapplication, the lack of / or incorrect pretreatment.

There is a 10-year warranty on fiberglass tanks up to 13" in diameter, 5-year on 14" and larger, 2-year on vinyl-lined tanks; 1-year on steel tanks; 5-year on salt tanks; 5-year on control valve; 1-year on valve nest and controls; 1-year on component material and workmanship. Water softener resins subjected to iron, manganese, and chlorine levels greater than 1 PPM are expressly not covered by this warranty. Manganese Greensand media and expendable medias such as, activated carbon, Filox™ and neutralizing media are not covered by this warranty.

Filters, membrane elements and flow restrictors that become fouled or plugged due to excessive turbidity, dissolved solids, or microorganisms are not covered by this warranty or any other implied or expressed warranty.

Labor and site visits are not included. Warranty is limited to repair or replacement of defective part (manufacturer's choice). Freight and shipping are not covered by this warranty. This limited warranty does not cover failure in service due to fire, freezing, abuse, shipping damages, misapplication, water hammer, sunlight damage, high temperature failure (i.e. hot water back up), improper electrical connection or hi/low voltage, nor does it extend to consequential damages such as water damage, or salt damage.

Distributed by:

