

For Residential and Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Slab Sensor 072

Dimensions: 3/8" OD x 1-1/2"
(10 mm OD x 38 mm)

The Slab Sensor 072 is designed to measure temperature in outside snow melting slabs. It has a high density polyethylene (HDPE) sleeve which is designed for use in conduits, soils, or concrete, as it is suitable for direct burial. This product is supplied with 20 ft (6 m) of 2 conductor cable.



Slab Sensor 072


Slab Sensor 072

DESCRIPTION	PROPERTY
Literature	ES-WR-Slab_Sensor-072, IOM-WR-Slab_Sensor-072
Packaged weight	0.4 lbs (180 g)
Dimensions	3/8" OD x 1-1/2" (10 mm OD x 38 mm)
Sensor material	HDPE sleeve, 20' (6 m) HDPE jacketed wire
Approvals	CSA C US
Operating range	-58 to 140°F (-50 to 60°C)
Sensor	NTC thermistor, 10 kΩ @ 77°F (25°C ±0.2°C) β=3892

Features

- 10K thermistor
- Water resistant
- 20 ft (6 m) cable

Side View

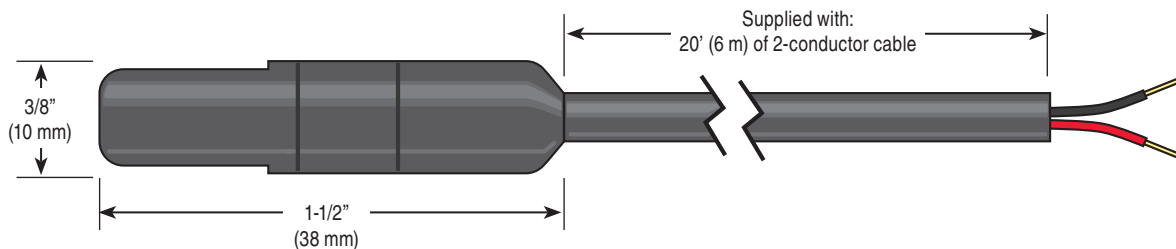

Product Options

Qty	Description	Model#	Order#
	Slab Sensor 072	300141	81007203

WattsRadiant™ Watts Radiant product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Radiant Technical Service. Watts Radiant reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts Radiant products previously or subsequently sold.

A Watts Water Technologies Company

USA: Springfield, MO • Tel. (800) 276-2419 • Fax: (417) 864-8161 • www.wattsradiant.com
Canada: Burlington, ONT. • Tel. (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca