

For Non-Health Hazard Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LFTC1

Full Port Test Cock


Sizes: 1/8" M x 1/4" F and 1/4" M x 1/4" F

The FEBCO Series LFTC1 is designed for the following applications:

- Test cock for backflow preventers
- Isolation valve for gauges
- Balancing Valve for gauges
- Lead Free* construction to comply with Lead Free* installation requirements

Features

- Lead Free* Cast Copper Silicon Alloy
- Full port design for low pressure drop.
- PTFE stem packing seal, thrust washer and seat.
- Quarter-turn open or close with slot for coin or screw driver to operate.
- Ideal for throttling and balancing applications of non-abrasive fluids where flow is 20% to 100% of valve capacity.
- Low operating torque.

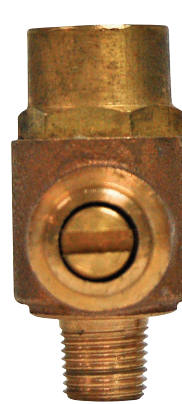


LFTC1

Dimensions and Weights

SIZE	DIMENSIONS								WEIGHT	
	A		B		F		G		lbs.	kgs.
in.	in.	mm	in.	mm	in.	mm	in.	mm		
1/8M x 1/4F	1/8 x 1/4	3.0 x 6.4	1 1/4	45	1 1/16	17	1 1/16	17	.06	.03
1/4M x 1/4F	1/4	6.4	1 1/8	48	1 1/16	17	1 1/16	17	.06	.03

Dimensions shown are nominal, allowance must be made for normal manufacturing tolerances.

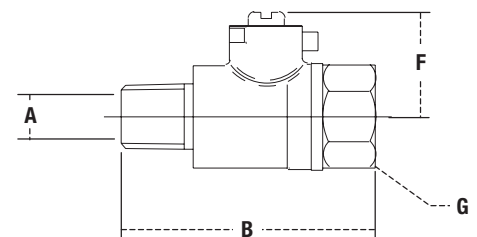

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

FEBCO product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact FEBCO Technical Service. FEBCO reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on FEBCO products previously or subsequently sold.



A WATTS Brand

USA: Tel: (800) 767-1234 • Fax: (800) 788-4491 • FEBCOonline.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • FEBCOonline.ca

Latin America: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • FEBCOonline.com