

FD-300 Tag: _____

Area Drain with 7" Adjustable Top

SPECIFICATION: Watts Drainage FD-300 epoxy coated cast iron area drain with anchor flange, weepholes, 7"(178) diameter adjustable top with heel proof ductile iron grate, and no hub (standard) outlet.

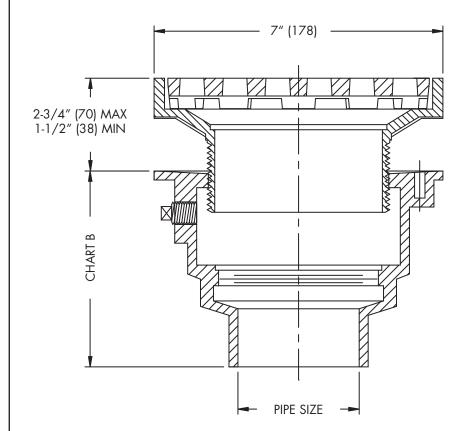


Chart B

	NH(MJ)	Р	60/61
Pipe	No	Push	PVC/
Size	Hub	On	ABS
2"(51)	4-1/2" (114)	5-1/2" (140)	4" (102)
3" (76)	4-1/2" (114)	5-1/2" (140)	4" (102)
4" (102)	4-3/4" (121)	5-1/2" (140)	4" (102)

Load Rating & Free Area

Load	Free Area
Rating	Sq. In.
*XHD	11

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:

ASME Ratings are as follows: XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg) The above categories are given as a guide only. Please consult factory.



Suffix	Pipe Sizing (Select One) Description	
2	2"(51) Pipe Size	
3	3"(76) Pipe Size	
4	4"(102) Pipe Size	

Outlet Type (Select One) Suffix Description		
NH P	No Hub (M) Push On	

Options (Select One or More)		
Suffix	Description	
-1	Nickel Broze Top	
-5	Sediment Bucket	
-6	Vandal Proof	
-7	Trap Primer Tapping [
-8	Backwater Valve (2,3,4" Only)	
-13	Galvanized Body	
-21	Secondary Strainer	
-34	Closure Plug	
-C	Membrane Clamp	
-F4-50	4" Round Cast Iron Funnel	
-F4-1	4" Round Nickel Bronze Funnel [
-F6-1	6" Round Nickel Bronze Funnel [
-G-50	4x9" Oval Cast Iron Funnel	
-G-1	4x9" Oval Nickel Bronze Funnel [
-US	Buy American Compliant	

Optional Body Material		
Suffix -60	Description PVC Body w/Socket Outlet	
-61	ABS Body w/Socket Outlet	

Job Name	Contractor
Job Location	Contractor's P.O. No
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com

ES-WD-FD-300 USA 1347 FD-300