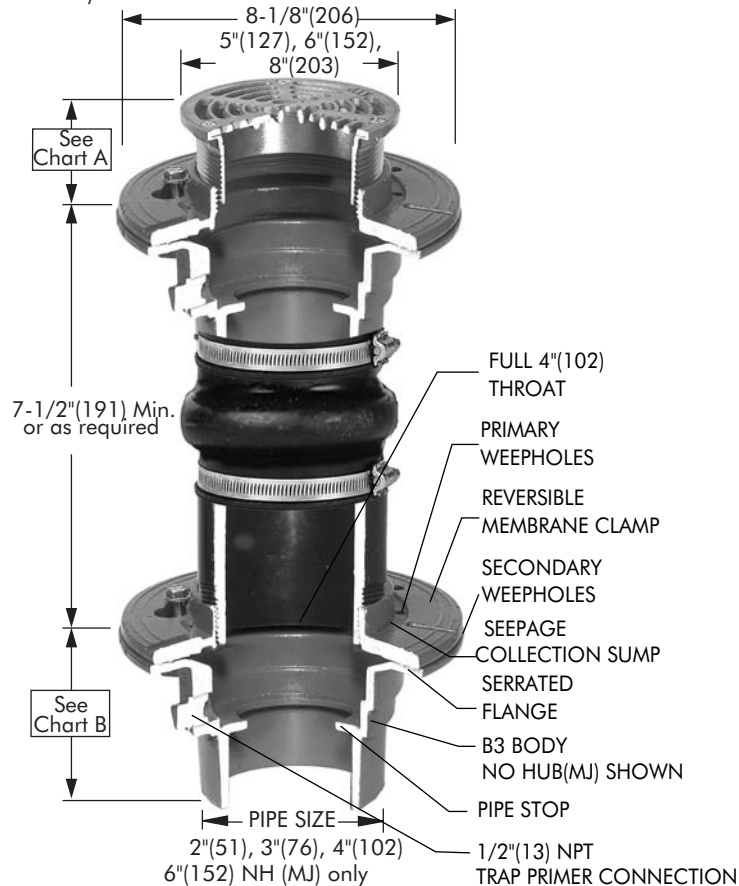


**FD-600**

Tag: \_\_\_\_\_

**Isolation (Floating) Finished  
Area Floor Drain****Components:****B3****BLT3-XYC****A or STD**

**SPECIFICATION:** Watts Drainage Products FD-600 epoxy coated cast iron floor drain with upper and lower bodies with serrated clamping flanges with integral double weepholes, membrane clamps, and round adjustable (specify diameter) nickel bronze (standard) strainer.

**Chart A**

Str. Dia.	Min.	Max.	Load Rating	Free Area Sq. In.
5"(127)	7/8"(22)	3-1/4"(83)	*MD	8
6"(152)	1"(25)	3-3/8"(86)	*MD	9
8"(203)	1-3/8"(35)	3-1/4"(83)	*MD	12

\* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:  
MD - Safe Live Load 2000-4999 lbs.(900-2250kg)  
The above categories are given as a guide only.  
Please consult factory.

**Chart B**

	Std.	P	T	X	60/61
Pipe Size	No Hub	Push On	Female Thread	Inside Caulk	PVC/ABS
2"(51)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	3-3/4"(95)
3"(76)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	3-3/4"(95)
4"(102)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	4"(102)
6"(152)	3-1/2"(89)				

Order Code: **FD-60** ☐ ☐ - ☐ ☐ ☐**Ex. FD-602P-A6-1-8****Pipe Sizing (Select One)**

Suffix	Description	
2	2"(51) Pipe Size	<input type="checkbox"/>
3	3"(76) Pipe Size	<input type="checkbox"/>
4	4"(102) Pipe Size	<input type="checkbox"/>
6	6"(152) Pipe Size	<input type="checkbox"/>

**Outlet Type (Select One)**

Suffix	Description	
NH	No Hub (MJ)	<input type="checkbox"/>
P	Push On	<input type="checkbox"/>
T	Threaded Outlet	<input type="checkbox"/>
X	Inside Caulk	<input type="checkbox"/>

**Strainer (Select One)**

Suffix	Description	
5-1	5"(127) Diameter, Nickel Bronze	<input type="checkbox"/>
5-4	5"(127) Diameter, Ductile Iron	<input type="checkbox"/>
6-1	6"(152) Diameter, Nickel Bronze	<input type="checkbox"/>
8-1	8"(203) Diameter, Nickel Bronze	<input type="checkbox"/>
A5-1	5"(127) Diameter, Nickel Bronze	<input type="checkbox"/>
A6-1	6"(152) Diameter, Nickel Bronze	<input type="checkbox"/>

**Options (Select One or More)**

Suffix	Description	
-5	Sediment Bucket	<input type="checkbox"/>
-6	Vandal Proof	<input type="checkbox"/>
-8	Backwater Valve (3" / 4" Only)	<input type="checkbox"/>
-12	Galvanized Top	<input type="checkbox"/>
-13	All Galvanized	<input type="checkbox"/>
-113M	Special Epoxy from 3M Range	<input type="checkbox"/>
-F4-50	4" Round Cast Iron Funnel	<input type="checkbox"/>
-F4-1	4" Round Nickel Bronze Funnel	<input type="checkbox"/>
-F6-1	6" Round Nickel Bronze Funnel	<input type="checkbox"/>
-G-50	4x9" Oval Cast Iron Funnel	<input type="checkbox"/>
-G-1	4x9" Oval Nickel Bronze Funnel	<input type="checkbox"/>

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_

Job Location \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_

Engineer \_\_\_\_\_ Representative \_\_\_\_\_

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.

CANADA: 5435 North Service Road, Burlington, ON, L7L 5H7 TEL: 905-332-6718 TOLL-FREE: 1-888-208-8927 Website: [www.wattsdrainage.ca](http://www.wattsdrainage.ca)