


Mustang Series

M116-5 or M6116-5 (Globe)
M1116-5 or M61116-5 (Angle)

- Throttles open when upstream pressure is above setpoint
- Throttles closed when upstream pressure is below setpoint
- Hydraulic Check Feature prevents flow reversal
- Adjustable Closing Speed
- When installed between two pressure zones acts as Pressure Sustaining Valve
- When installed on discharge of a pump acts as Backpressure Control Valve
- Setpoint is adjustable

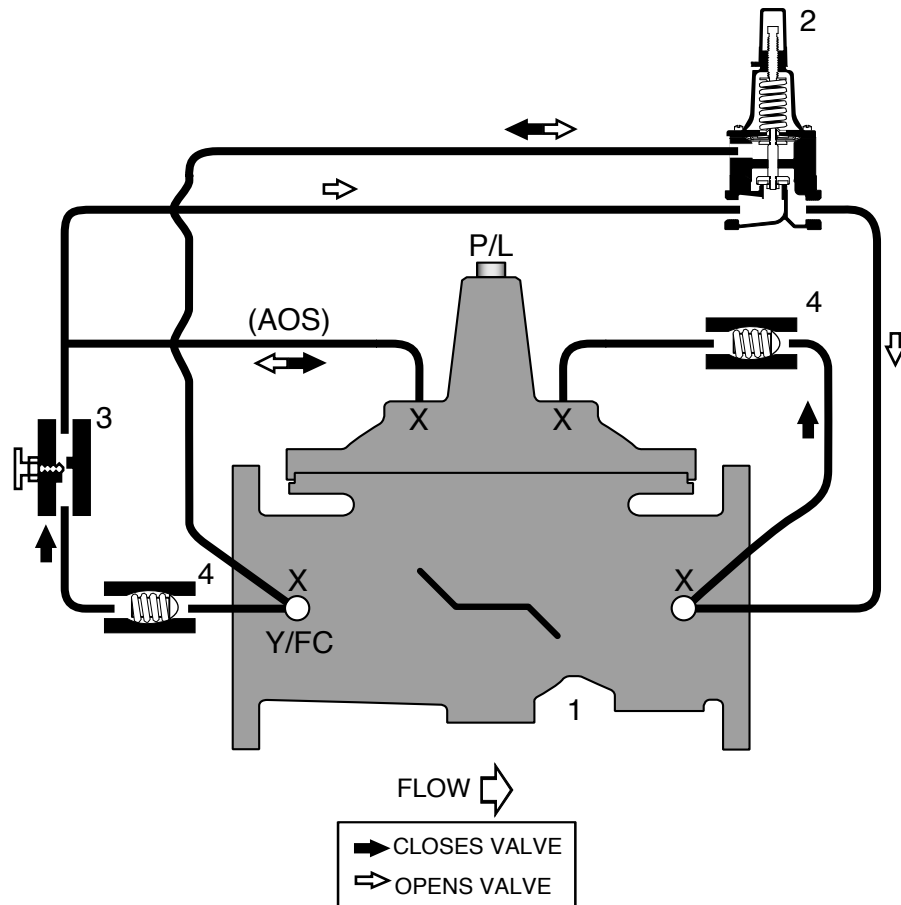

STANDARD COMPONENTS

- 1 - Main Valve (Single Chamber)
- 2 - Pressure Sustaining Control
- 3 - Adjustable Closing Speed
- 4 - Check Valve

OPTIONS and ACCESSORIES

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo-Clean)
- AOS – Adjustable Opening Speed
- P - Position Indicator
- L - Limit Switch